



SIP Connector A5



Summary :

Make your own 30W~60W SIP speaker or intercom station. Being highly customizable this intercom module can cover your need for VoIP anywhere, for handle up to 8 units Speaker.

The top complaint about voice audio in the security industry is how poor audio quality affects everything, from providing a more secure environment, to critical mistakes and inefficiencies due to inadequate communications. However, our SIP connector A5 offers HD audio quality for indoor and outdoor environments, and it can, for example, be used as a communication solution for Taxi or bus stands or station, highway call box, railway, metro, ATM machines side, tunnel, port, dock, mines, generation facilities. Plus, to improve audio quality, it features active noise cancellation and a 60W Class D amplifier.


Specifications:

Model	A0-005-30	A0-005-60
Output Level	30 watts* 1	30 watts*2
Dimensions (W*H*D)	200*200*95mm	200*200*95mm
Weight	2.6kg	2.6kg
Frequency	50 - 15K Hz	50 - 15K Hz
Ethernet I/F	10/100 Mbps	10/100 Mbps
Audio Compression	G.711,G.722,G.729	G.711,G.722,G.729



Operating Temperature	-40 degrees C to 70 degrees C(14 degrees F to 122 degrees F)	-40 degrees C to 70 degrees C(14 degrees F to 122 degrees F)
Connector	Ethernet, RS-232, Analog Port	Ethernet, RS-232, Analog Port
Features	Remote monitoring, Overload protection, Digital Signal Processing (DSP)	Remote monitoring, Overload protection Digital Signal Processing (DSP)


Network building:

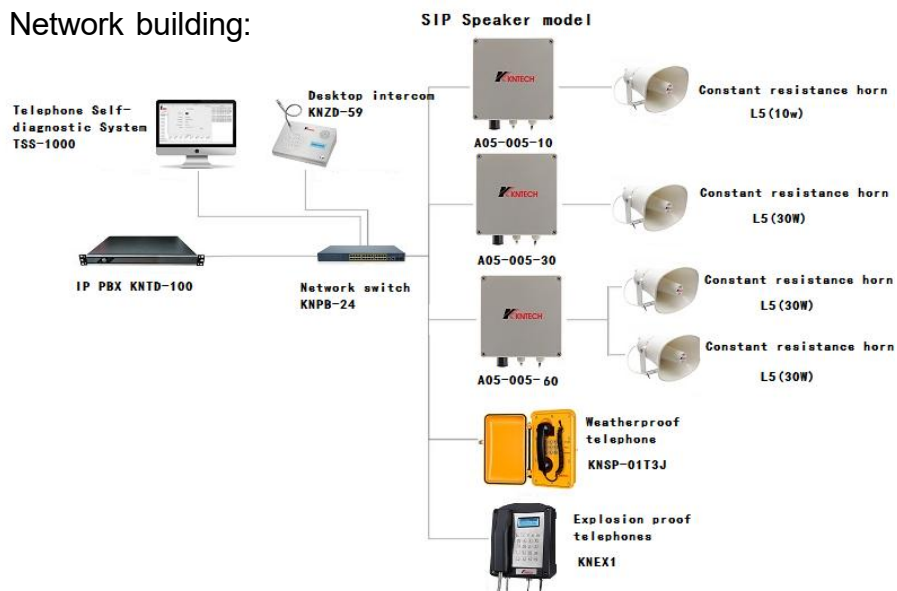

Speaker:



Standard size:

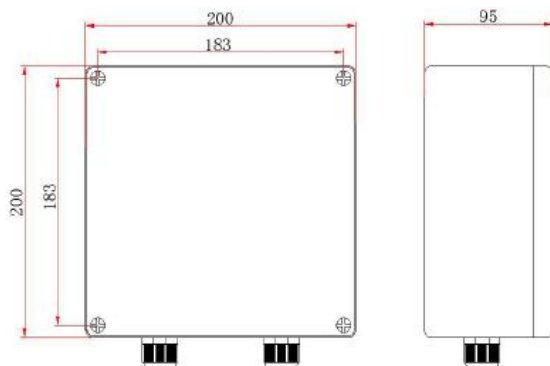

Hongkong Koon Technology Ltd

Web: www.koontech.com

E-mail: marketing@koontech.com