

Features

- Analogue telephone matching with most PABX, PBX and PAX system
- Robust body vandal resistant
- Busy tone detection for auto release the line if line busy
- Dry contact for external control automation
- Auto answer
- Full Soft lock: only dial out from phone book 50 memory address number
- Half soft lock: limit to dial out starting number, e.g. "00852" area code
- High temperature approval
- Ring sound 95 dB dfd in 1 m and 10 ringing tone melodies selectable
- Listening by loudspeaker: 70dB in 1m
- Phone book memory: 50 address (name & number) programmable
- Stainless steel keypad for dial and manuel
- Magnetic reed hook-switch
- Telephone line powered. No external power or battery required




With keypad option model: KNEX1







Model number: KNEX2

Certificate:



Explosion-proof Telephone
 Model: KNEX1
 Ex e ib mb IIc T6 Gb
 Ex tb IIIc T80°C Db -25°C ≤ Ta ≤ +60°C
 CQM XXX
 IECEx XXXX
 CE 14 XXXXXX
 ShenZhen Xijun Technology Ltd
 6/F 268# Nanchang ind. park Gushu Baoan
 Shenzhen China
 2012 s/n 001

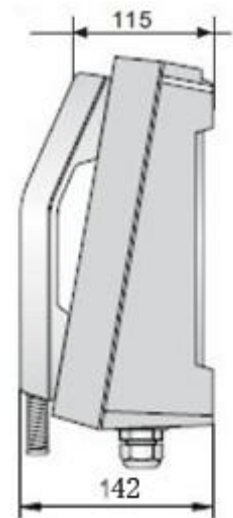
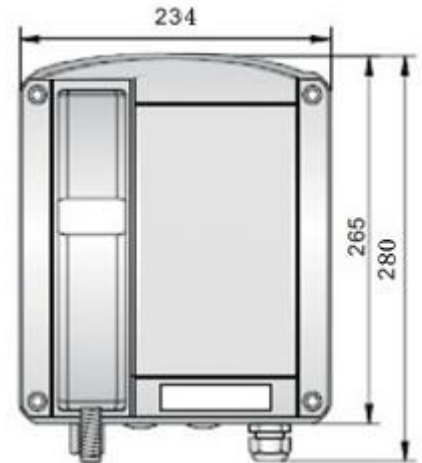









Specification

Unit dimension	227 x 293 x 135mm
Unit Weight	5.8kg
Handset:	dynamic receiver with inductive coupling for hearing aids Electret type microphone with noise cancelling Stainless steel armoured handset hold over 170kg
Waterproof protection	IP66
Impact protection:	IK09
Call Flash transfer:	max:120ms
Dialling procedure:	DTMF
External function:	external louder speaker additional earpiece ringl sounder
operation temperature:	-25°C to 60°C
Storage temperature:	-30°C to +70°C



Factory Photo:

Regular Customer

THALES SIEMENS



ERICSSON
TAKING YOU FORWARD

AVAYA
The Power of We



Web: www.koontech.com, www.directindustry.com/tab/koon.html www.koontech.en.alibaba.com www.hksosphone.com

Tel: 0086 755 29116322/27448753 Fax: 008675529790278 E: jenny@koontech.com and koon03@vip.163.com