

Industrial LED Beacon Model number: D28



Description

D28 LED beacon high brightness LED lamp and intelligent IC control function, shade with focus function, more flash brightness, better quality, running stabler. Used in electrical power, telecommunications, machine tools, shipbuilding, printing, mining machinery and other equipment for indication signal, notice the signal, accident signal.

INPUT CHARACTERISTICS) :

(Input voltage range: from 24Vdc to 60Vdc, single-phase DC input) :

	Minimum	Maximum
Input Voltage	24VDC	60VDC

(Input Current):

(Input current range: from 130MA to 720MA)

	Minimum	Maximum
DC input current	130MA	720MA

ENVIRONMENTAL REQUIREMET:

Operating Temperature): $-25^{\circ}\text{C} \sim +65^{\circ}\text{C}$, Full load Normal operation

Storage Temperature: -20°C to 85°C , With box.

Relative Humidity:

$5\%(0^{\circ}\text{C}) \sim 90\%(40^{\circ}\text{C})$ RH, 72Hrs, Full load Normal operating.

Altitude:

Operating: ≤ 2000 meters

Non-operating: ≤ 2000 meters

Dropping Packed:

PC case, ABS base, internal screws, LED SMD lamp beads.

Height: 76mm no shell rupture

4、 MECHANICAL REQUIREMENT:

4.1 Enclosure:

Material requirements: PC



4.2 Enclosure:

Material requirements:reflector panel (PC)


4.3 PCB BOARD(Enclosure):

Material requirements:glass fibre

4.4 LED(Enclosure):

Lamp type: 24particle (5730)

Color temperature of lamp:5500-6500K

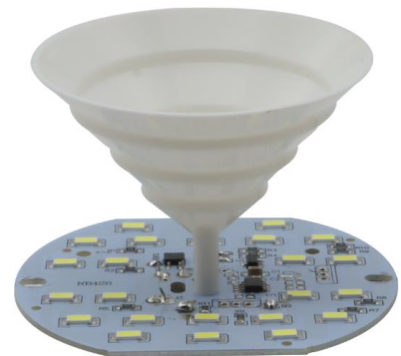

4.5 Foot mounting (Enclosure):

Material requirements: (ABS)




4.6 Cable (Enclosure):

Material requirements:Silica gel thread

Silica gel wire: 0.5 m2/wire length 200mm



Products size:

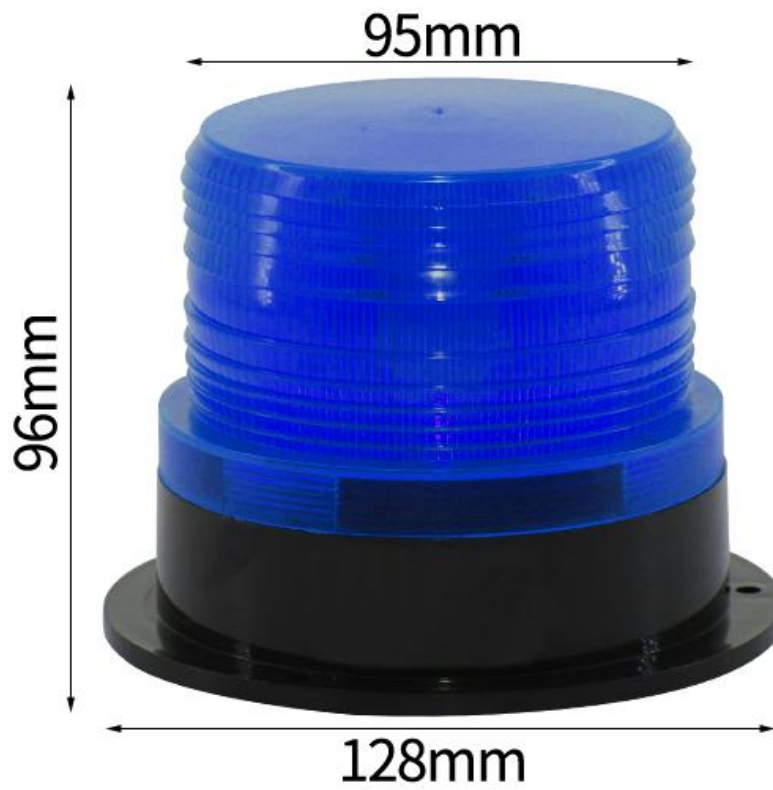

Moulding size:



Order number:

Red color order number: D28-R

Yellow color order number: D28-Y

Blue color order number: D28-B

Green color order number: D28-G

D28-R-12V	D28-R-24V	D28-R-48V	D28-R-60V	Red color order number
D28-Y-12V	D28-Y-24V	D28-Y-48V	D28-Y-60V	Yellow color order number
D28-B-12V	D28-B-24V	D28-B-48V	D28-B-60V	Blue color order number
D28-G-12V	D28-G-24V	D28-G-48V	D28-G-60V	Green color order number

12V always lighting on and could not flash

24V/48V/60V can choose flash lighting or always lighting on.



5、 Standard package

1.) Red color box: 1pcs/inner box
2.) QTY per CTN box: 60pcs/CTN
3.) CTN SIZE: 67*40.5*55.5 CM
4.) G.W: 17KG

