



VoIP KNZD-42IP Door Phone

DESCRIPTION ITEM

KNZD-42IP Voice Door Phone offers a full digital network and KNTech VoIP solution for the secure access control and monitoring of a building entrance. This advanced Door phone supports SIP 2.0 and operators of IMS platform guaranteeing easy customization for telephone operators and service providers.

Features

- SIP V1/V2(RFC2543/RFC3261)
- One speed dial Key
- Integrated Numeric Keypad
- Support PoE(802.3af)
- DTMF Switch control



How to open the door?

- 1) Password
- 2) Remote DTMF

Benefits

- Compatibility supports SIP 2.0 platform, effective inter connection and inter working with the mainstream IPPBX manufacturers
- High-end chip
Equipped with the latest Reliable chip set
- Carrier standard voice
Full duplex hands-free speaker phone, carrier standard voice
- Flexible of lock approach
passwords , DTMF Switch control
- A key to call
One Speed dial Key
- Multiparty calls
Holding/waiting 3 ways call /conference
- Easy installation
integration into the existing LAN
- Visitors leave a message
Provide access to the message and playback message through the SIP phone



- Simple maintenance
support online software upgrades and web management way
- Protective level
IP53 against dust, water, and mechanical damage

Target Groups

Business: offices, shopping areas
 Education: universities, campuses, schools, sports areas
 Health care: hospitals, laboratories, Pharmaceutical factory
 Logistics & Transportation: airports, parking lots or garages
 Industries: factories, product center

Technical Parameters

Signalling protocol		Interface	
SIP 2.0(RFC2833)		Power supply	12V±15%/1A DC or PoE
Buttons			48V/380mA
Quick dial buttons	Buttons are made of stainless steel material, strong and durable.	LAN	10/100BASE-TX s Auto-MDIX, RJ-45)
Number of speed dial buttons	1	The recommended cable	Super five or more
Numeric keypad	touch buttons	Relay outputs	NC/NO contacts, max 30V/1A AC/DC
Audio		Active relay output	12V/500mA DC
Microphone	1A 8Ω	Mechanical	
Loudspeaker	3W	Cover material	Aluminum alloy cover, plastic pan
Hands-free haft-duplex	support	Operating temperature range	0°C – 55°C
Audio stream		Storage temperature range	-40°C – 70°C
Support protocol	RTP	Relative humidity	10% - 95% (not condensing)
Codecs	G.711,G.729,G.722,GSM,G.726,iLBC	Installation	Embedded installation
		External dimensions	174.5×96×44 mm
		Protection level	IP53

KNZD-42IPR Voice Door Guard inherits the characteristics of the bearing VoIP products ,and it can be effective interworked with the mainstream IPPBX manufacturers,like Cisco、Avaya、3CX、Asterisk、BroadSoft




SPECIFICATION

VoIP SIP2.0 telephone DTMF dialing
MTBF:100000hours MTTR: 2 hours
Free dial (maximum length of each number is 32 digits)
Communication: Full duplex 2-way
Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)
Power:Power over Ethernet, IEEE802.3af, Class 0
Local power, 12VDC,Idle 2W, Max 10W
Auxiliary Contacts: (option)
1 Aux Output, dry contact
Dry contact Load parameter
Rated load:0.3 A at 125 VAC; 1 A at 30 VDC
Rated carry current:1A
Max.switching voltage:125 VAC,60VDC
Max.switching current:1A


Audio Codes:G.711, G.722, G.729,G723,G.726
Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better
IP Protocols:IPv4, TCP, UDP, RTP, DHCP, SIP
1 x LAN Power over Ethernet(PoE,802.3af)
1 x LAN(IEEE 802.1x), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)
Programming:Non-volatile flash memory programming and configuration through Web GUI
Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring
Echo cancellation code: ITU-T G.167/G.168

INSTALLATION

The first step is to install the bottom box to the wall.

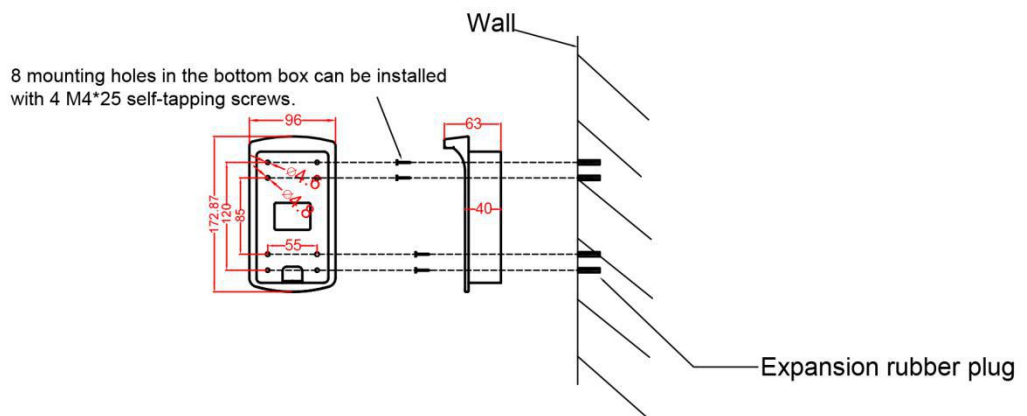

The second step is to load the panel box into the bottom box.

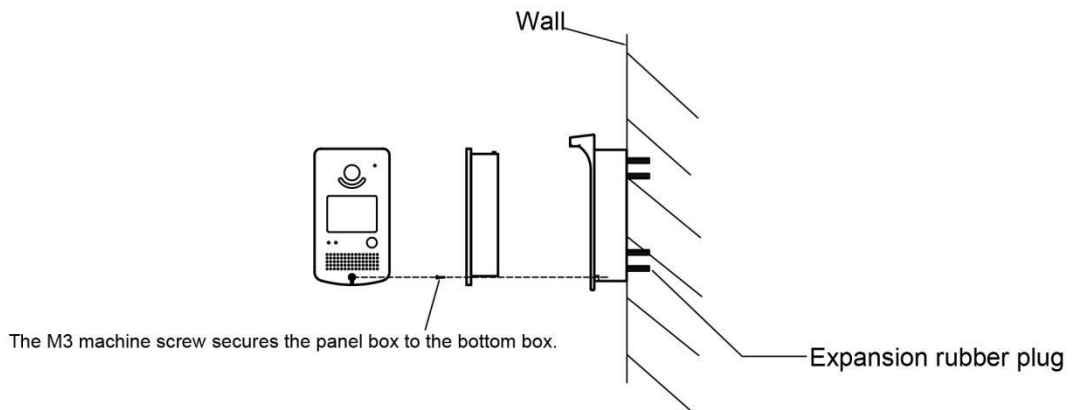

ICERTIFICATION

EN55022: emissions

EN55024: immunity

Ingress Protection: GB4208-93 IP66 FCC

ITU-T Recommendations K21

EMC: EN50121(Railway application-Electromagnetic Compatibility)



RoHS

PACKING



1pcs packing box size:175 *130 *9mm

G.W:0.75KG

12pcs in 1 outer Carton box: size: 190X400X380mm

G.W:9.4KG

IMAGE DISPLAY

