

昆 仑 科 技

www.koontech.com

香港昆仑科技（深圳）有限公司

Regular Customer

THALES SIEMENS



Alcatel-Lucent



HUAWEI

ERICSSON
TAKING YOU FORWARD

AVAYA
The Power of We



Induction Loop Installed
To use, please switch your
hearing aid to 'T'

Optional Induction loop
facility for hearing impaired
12V DC required


Hongkong Koon Technology Ltd
www.koontech.com

Emergency telephone **KNZD-11**



The most professional manufacture in Asia The exclusive supplier for all Metro project in China

The Weatherproof phone will be designed to work on Railway, metro, tunnel, etc. Housed in cold rolled steel case with spring loaded door, it will offer protection against the outdoor environment, vandals resistance and rot resistance. The unit will meet all the latest European/UK standards for EMC and US FCC, telephony, waterproofing, and lightening protection together with offering the level of performance and reliability demanded in such an environment.

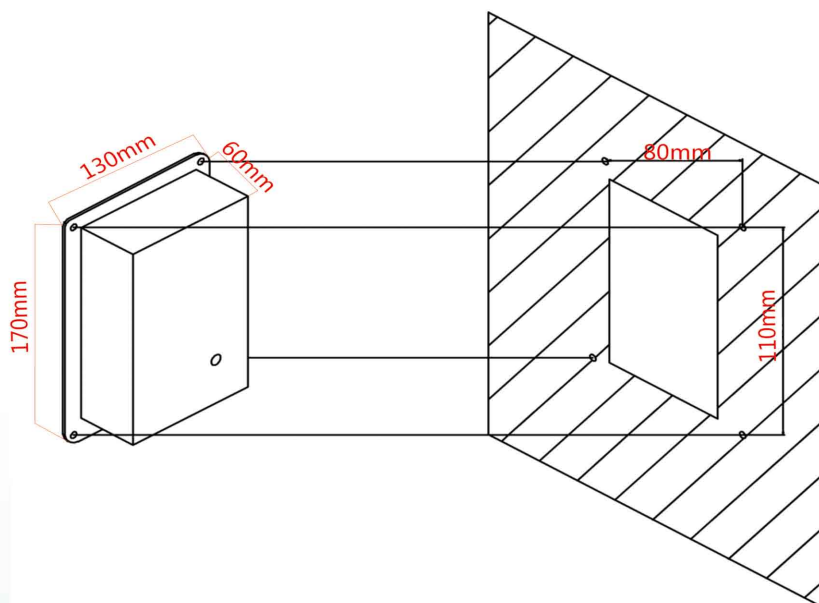

Main Product features

1. Cold rolled steel body,, solid and temperature bearable
2. High durability, oil, acid, alkali resistance, conform to the standards of GJB - 773 and UL1332 requirements.
3. Without handset, communication via loudspeaker.
4. Highly integrated mainboard, using the most advanced industry-specific microcontroller made in ATMEL company.
5. The box with earthing device is completely isolated with internal electric circuit, and has certain electromagnetic shielding effect.
6. Conversation with clear loud voice, no feedback screaming.
7. Support hotline of exchange system.
8. Support the function of exterior line automatic lift.
9. Support conversation time limited.
10. Strong, thick and beautiful body with embed wall design.
11. talking distance: 80cm-100cm.



- Standard and SMART Analogue and VoIP-SIP options available
- DTMF(Dual Tone Multi Frequency)
- Matching with most PABX,PBX and PAX systems.

Main PCB

1. Well treated PCB used inside the phone.
2. Robust screw terminals used for the connection of ringer, handset, line in, hookswitch.
3. Selectable 7 minute time out, to release the line if the handset is left off hook.
4. All connectors be greased in production.

VOIC OVER IP- SIP (Version)

Connection type: RJ45 Socket inside sealed enclosure

Power supply: External 5V dc

Call set-up Protocol: Session Initiation Protocol(SIP)


Configuration: DHCP or STATIC IP address provisioning



1 2 3

The most professional manufacture in Asia
The exclusive supplier for all Metro project in China

Telephone layout

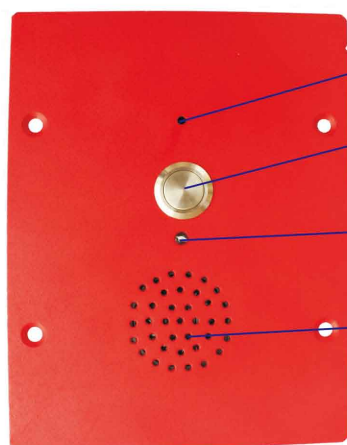


Microphone
Calling
Answering button
LED light
Speaker

TECHNICAL SPECIFICATION

1. It is suitable for automatic instruction amplification telephone system when feed voltage reaches to 33- 60V.
2. Environmental temperature: -30°C ~ 60°C
3. Relative humidity: 10% ~ 95%
4. Atmospheric pressure: 86 ~ 106Kpa
5. Environmental noise: ≤80dB
6. Double audio dialing
7. Standard frequency: 697, 770, 852, 941Hz
8. Low frequency group: 697, 770, 852, 941Hz
9. High frequency group: 1209, 1336, 1477Hz
10. Frequency offset: $\leq \pm 1.5\%$
11. The signal level when the length of user's line is 3km:
12. Standard frequency: Low frequency group: -9dB
13. High frequency group: -7dB \pm 3dB
14. Level difference between high and low frequency of combined signal: 2 \pm 1dB
15. The total intermodulation distortion caused by harmonic is 20dB lower than wave level.
16. Call transmission index: (5Km) SLR \leq 12, RLR \leq -1, and STMR \geq 10, Input impedance: 600 Ω
17. Handsfree operation built-in loud speaker 0.5W.


Mounting bracket

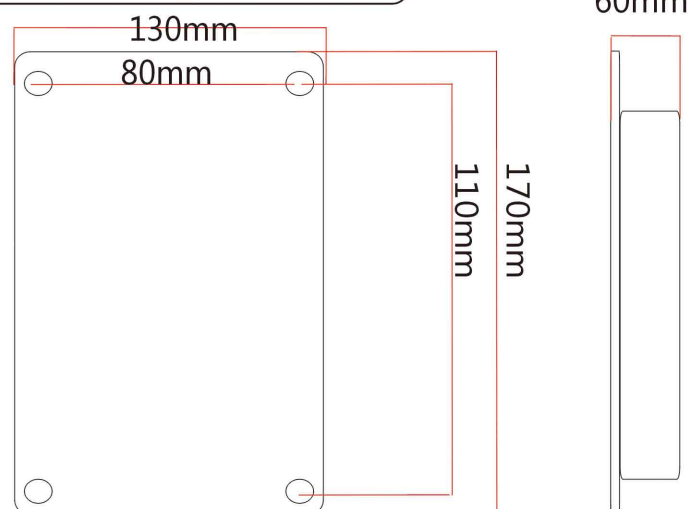

Connection cable

Stainless steel connection cable to exchange.
Well treated keep waterproof.

Packing detail:

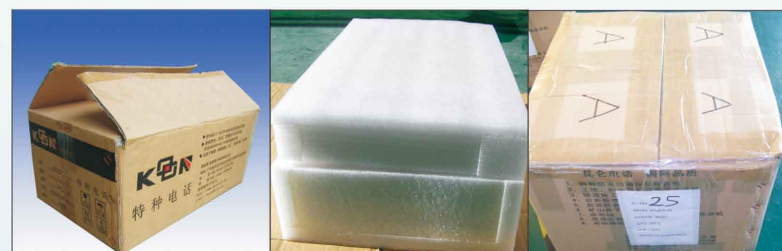

Unit size: 170*130*60mm, N.W: 0.65KG

1pcs in each inner CTN box, size: 200*140*100mm G.W: 0.85KG

4pcs in outer CTN box, size: 439*277*191mm G.W: 4.1KG

Certification:



EMC: EN50121 (Railway application-
Electromagnetic Compatibility)
EN5022: emissions
En5024: immunity

FCC

ITU-T Recommendations K21