



KNZD-14 GSM Hotline Telephone

DESCRIPTION ITEM NO.ZD0140032


1. Cold-roll steel body, vandal & tamper-resistant hardware, easy installation
2. Handset free, 3W loudspeaker
3. Lightning protection to ITU-T K.21
4. Without keypad, support hotline dial
5. Magnetic reed hook-switch
6. Waterproof grade is IP55
7. Handset with industrial strong metal cord
8. Wall mounted type installation
9. Network interface: GSM/CDMA Frequency 700MHz, /1900MHz (1700/2100Mhz is an option)
10. Power supply: DC9V~12V/1A
11. Operating temperature: -20°C to +60°C. (Expanded temperature -40°C to +70°C is an option)
12. Supports time-stop function (20 mins phone etc). Optional
13. Powder coated in UV stabilized polyester finish, defaulted red color, yellow, green, etc optional
14. It can send and receive SMS message, linked to the activation of emergency buttons or to activation of local sensors



SPECIFICATION

- Module: SIM7600SA
- Ringing: Through internal speaker/ ringer minutes.
- Full duplex communication.
- Power supply: 9V/6A h/7.4V
- Time out: Selectable 0-20 minutes.
- Automatic and remote volume control.(Option)
- Supported SMS
- Sound level of ringing: $\geq 70\text{dB(A)}$. 3W speaker.
- On-site or remote diagnostics and programmable. (Option)
- Telephone panel and shell can be selectable.
- Operating temperature: $-20\text{ }^{\circ}\text{C}$ to $+60\text{ }^{\circ}\text{C}$.
(Expanded temperature $-40\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$ is an option)
- Relative humidity: 10% to 95%.
- Power Adapter: Input AC100- 240V 50/60Hz
Output: DC9V 1A
- MTBF : 100000 Hours.
- MTTR : 15-20 Min.
- CE, RoHS Compliant.

INSTALLATION

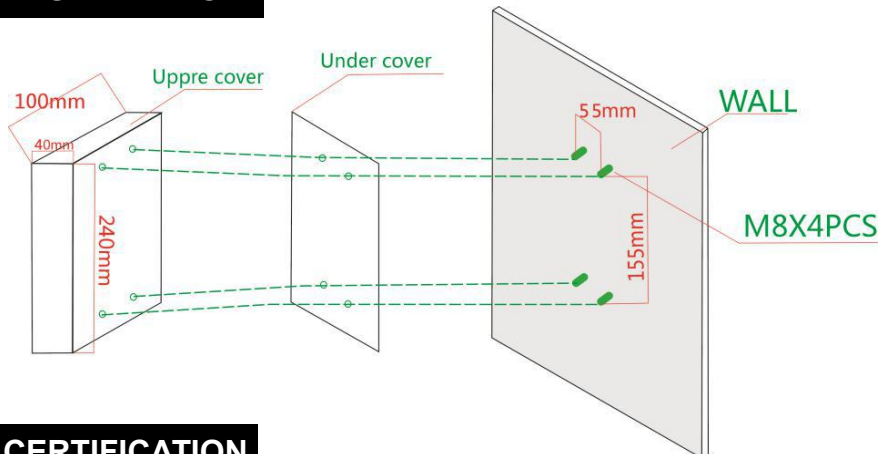

CERTIFICATION

RCM: AS/NZS CISPR 32 Australian communications:AS/CA S004
 Australian Equipment-safety: AS/NZS 60950.1:2015
 EMC: EN50121(Railway application-Electromagnetic Compatibility)



PACKING



Unit size:240*130*35mm Unit: N.W:1.36KG
 1pcs packing box size: 310*170*140mm Unit N.W:1.36KG Unit G.W:2KG
 12pcs packing box size::710*370*420mm Unit N.W:16.32KG Unit G.W:29.6KG