

昆仑科技

www.koontech.com

香港昆仑科技(深圳)有限公司


Regular Customer

THALES SIEMENS



求助电话  
Help Line

按 press	⋯
按钮 Button	话筒 Microphone



使用程序 Instruction



1 按摘机  
Press the "On / Off" Button



2 贴近话筒通话  
Speak into the microphone

按 press	⋯
按钮 Button	话筒 Microphone



Optional Induction loop facility for hearing impaired  
12V DC required  
Hongkong Koon Technology Ltd  
www.koontech.com


Emergency telephone SUSKNZD-17





## The most professional manufacture in Asia The exclusive supplier for all Metro project in China

The emergency call telephone will be designed to work on railway, metro, tunnel, etc. Housed in stainless steel box with one CALL/ ANSWER button, it will offer protection against the outdoor environment and vandals. The unit will meet all the latest European/UK standards telephony, waterproofing IP65, and lightning protection together with offering the level of performance and reliability demanded in such an environment.

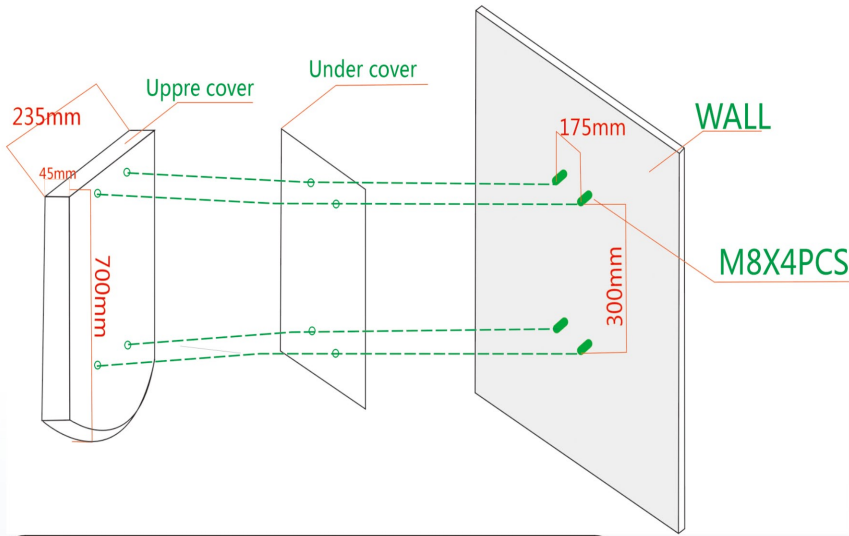

80-100cm

### Main Product features

1. High waterproof, dustproof performance, SUS304 full stainless steel body, protection grade reaches to IP65.
2. High durability, oil, acid, alkali resistance, conform to the standards of GJB - 773 and UL1332 requirements.
3. Hear aid compatible receiver, Noise canceling microphone.
4. Press key integrity wiring to enable the telephone system to check if the telephone unit is still optional.
5. Highly integrated mainboard, using the most advanced industry-specific microcontroller made in ATMEL company.
6. The box with earthing device is completely isolated with internal electric circuit, and has certain electromagnetic shielding effect.
7. Conversation with clear loud voice, no feedback screaming.
8. Support hotline of exchange system.
9. Support the function of exterior line automatic lift.
10. Support conversation time limited.
11. Two call button, one for normal and the other one for disabled.
12. Strong, thick and beautiful body with embedded wall design.
13. Above press key for regular passing traveler and underside press key for handicapped.
14. talking distance: 80cm-100cm.

- Standard and SMART Analogue and VoIP-SIP options available
- DTMF(Dual Tone Multi Frequency)
- Matching with most PABX, PBX and PAX systems.

### Main PCB

1. Well treated PCB used inside the phone.
2. Robust screw terminals used for the connection of ringer, handset, line in, hookswitch.
3. Selectable 7 minute time out, to release the line if the handset is left off hook.
4. All connectors be greased in production.

### VOIC OVER IP- SIP ( Version )


Connection type: RJ45 Socket inside sealed enclosure  
Power supply: External 5V dc  
Call set-up Protocol: Session Initiation Protocol(SIP)  
Configuration: DHCP or STATIC IP address provisioning






**The most professional manufacture in Asia**  
**The exclusive supplier for all Metro project in China**

### Telephone layout

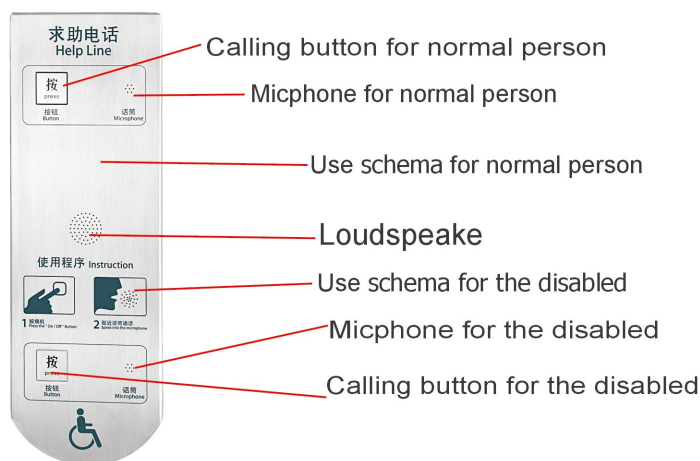


### Mounting bracket

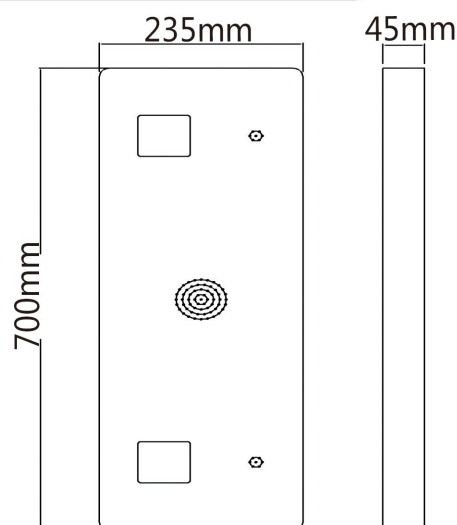

### Connection cable

Stainless steel connection cable to exchange.  
 Well treated keep waterproof.

### Packing detail:

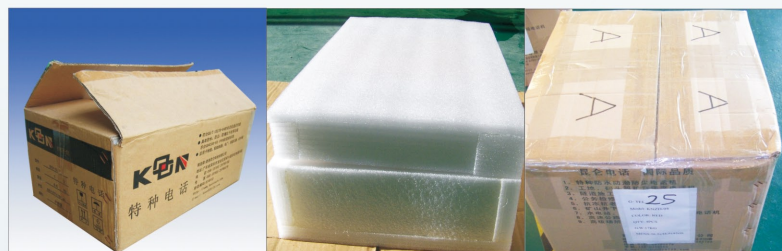

Unit size: 700\*235\*45mm ,  
 N.W: 5.5KG  
 2pcs in each inner CTN box, size: 785\*305 \*190mm  
 G.W: 6.1KG

### Certification:



EMC: EN50121 (Railway application-  
 ElectromagneticCompatibility)  
 EN55022: emissions  
 En55024: immunity  
 FCC  
 ITU-T Recommendations K21

### TECHNICAL SPECIFICATION

1. It is suitable for automatic instruction amplification telephone system when feed voltage reaches to 33- 60V.
2. Environmental temperature: -30'C ~ 60'C
3. Relative humidity: 10% ~ 95%
4. Atmospheric pressure: 86 ~ 106Kpa
5. Environmental noise: ≤80dB
6. Double audio dialing
7. Standard frequency: 697, 770, 852, 941Hz
8. Low frequency group:697, 770, 852 , 941Hz
9. High frequency group: 1209, 1336 , 1477Hz
10. Frequency offset: ≤ ±1.5%
11. The signal level when the length of user's line is 3km:
12. Standard frequency: Low frequency group: -9dB
13. High frequency group: -7dB±3dB
14. Level difference between high and low frequency of combined signal: 2±1dB
15. The total intermodulation distortion caused by harmonic is 20dB lower than wave level.
16. Call transmission index: (5Km) SLR ≤ 12, RLR ≤ -1, and STMR ≥ 10, Input impedance: 600Ω
17. Handsfree operation built-in loud speaker 0.5W.