



Analogue KNZD-27A Public Telephone

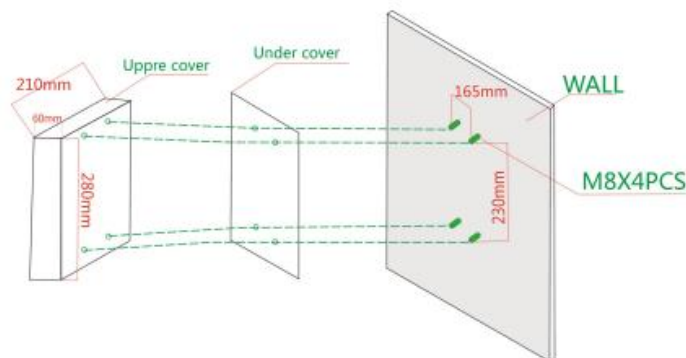
DESCRIPTION ITEM NO.ZD027A012

1. Cold-roll steel body, vandal & tamper-resistant hardware, easy installation.
2. Waterproof rating IP55 dust proof.
3. With three buttons to call, support speed dial.
4. Magnetic reed hook-switch.
5. Lightning protection to ITU-T recommendation K.21.
6. Heavy duty handset with hearing aid compatible receiver, noise canceling microphone.
7. Handset with industrial strong metal cord.
8. Telephone line powered.
9. SUS buttons keep waterproof and dusty proof.
10. Temperature range from -40 degree to +70 degree.
11. Support echo cancellation.
12. Phone integrity wiring comply with most PABX exchange system.
13. Optional 7 minute time out to release the line if the handset is left off hook. (This function upon buyer's requirement).
14. Powder coated in UV stabilized polyester finish, gray white, blue, red, support OEM.
15. The housing covered with a layer of reflective label for easy identification at night. Optional
16. Application: Prison, bank, airport, school, metro, railway station, LRT, hotel, supermarket and pedestrian areas in cities etc.



ZD027A012

1. PSTN analogue telephone
2. DTMF dialing
3. MTBF:100000hours
4. MTTR: 2 hours
5. Connection: RJ11 screw terminal pair cable
6. Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.
7. Ambient temperature:-30 ~ +60 degree. Relative humidity:10%~95%
Atmospheric pressure: 86~106Kpa Circumstance noise:less than 60dB(A)
8. Sound level of ringing:over 70dB(A).
9. Standard frequency:low frequency group:697. 770. 852. 941Hz,
high frequency group:1209. 1336. 1477Hz, frequency deviation:-1.5% ~ +1.5%
- 10.Call transmission index:(5KM)SLR<12,RLR<-1,STMR>10, output impedance is 600 Ohm.
maximum distance: 7KM
- 11.Connection: RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request)
with stainless steel cable protected

INSTALLATION**CERTIFICATION**

RCM: AS/NZS CISPR 32 Australian communications:AS/CA S004
 Australian Equipment-safety: AS/NZS 60950.1:2015
 EMC: EN50121(Railway application-Electromagnetic Compatibility)

**RoHS****PACKING**

Unit size:280*210*60mm Unit: N.W:2.6KG
 1pcs packing box size: 250*290*180mm Unit: N.W:2.6KG Unit G.W:3KG
 6pcs in 1 outer Carton box: size: 570*390*585mm N.W:18KG G.W:20KG