



Single Channel Power Amplifier KNMK-650

Descriptions

The range of power amplifiers is designed for general commercial and industrial public address applications. Rack mount design in 3U type, rated power ranges from 240W, 480W, 650W, which provides a wide selection to meet different size sound system demands. Both balanced and unbalanced line inputs make it selectable for installer, balanced line output feeds to another power amplifier as well as secures the signal transmission is less noise and longer distance. 70V, 100V and 4-16ohm speaker outputs are convenient for installation when selection different speaker matching. A master volume control is included. Complete protection includes clip, short circuit, high temp and overload. Indications for power, signal, clip, protection and temp.

Features

- * Rack mount amplifier in 3U type
- * Rated power from 240W, 480W, 650W
- * 70V, 100V and 4-16ohm speaker outputs
- * Isolated transformer for human safety operation
- * Balanced XLR type line input and unbalanced 1/4 inch TRS phone jack line input
- * Balanced XLR type line output feeds to another power amplifier
- * Reliable protection of over heat, over load, clip & short circuit
- * Indications for power, signal, clip, protection and temp
- * Excellent device of radiator cooling fan that ensures working effectively


Optional

- * DC 24V input available on less than 650W models
- * Panel with/without handhold
- * Faults monitoring module, it can output short circuit signal to achieve main/spare amplifier switch

Specifications

Model	KNMK-650
Rated Power Output	650W
Speaker Outputs	70V, 100V & 4~16 Ω
Input Sensitivity & Impedance	$\pm 385\text{mV}/20\text{K } \Omega$, Balanced XLR Input $775\text{mV}/10\text{K } \Omega$, Unbalanced TRS Input
Output Sensitivity & Impedance	$\pm 385\text{mV}/470 \Omega$, Balanced XLR output $775\text{mV}/470 \Omega$, Unbalanced TRS output
Overload Electromotive Force	> 15dB
Frequency Response	50Hz~16KHz(+1dB, -3dB)
S/N Ratio	> 90dB
THD	Less than 0.1% at 1KHz, 1/3 rated power
Ground Lift	Lift the earth line ground by switch GND/lift to "lift" position
Cooling	Fan automatically start up when temp reaches 55°C
Protection	Over heat, over load, clip & short circuit
Power Supply	~110V-230V 50/60Hz or DC 24V
Power Consumption	720W
Weight	15.24Kg
Dimensions	484x359x132mm
Finish	Panel: aluminum plate, black Case: Steel plate, black

Rear Panel

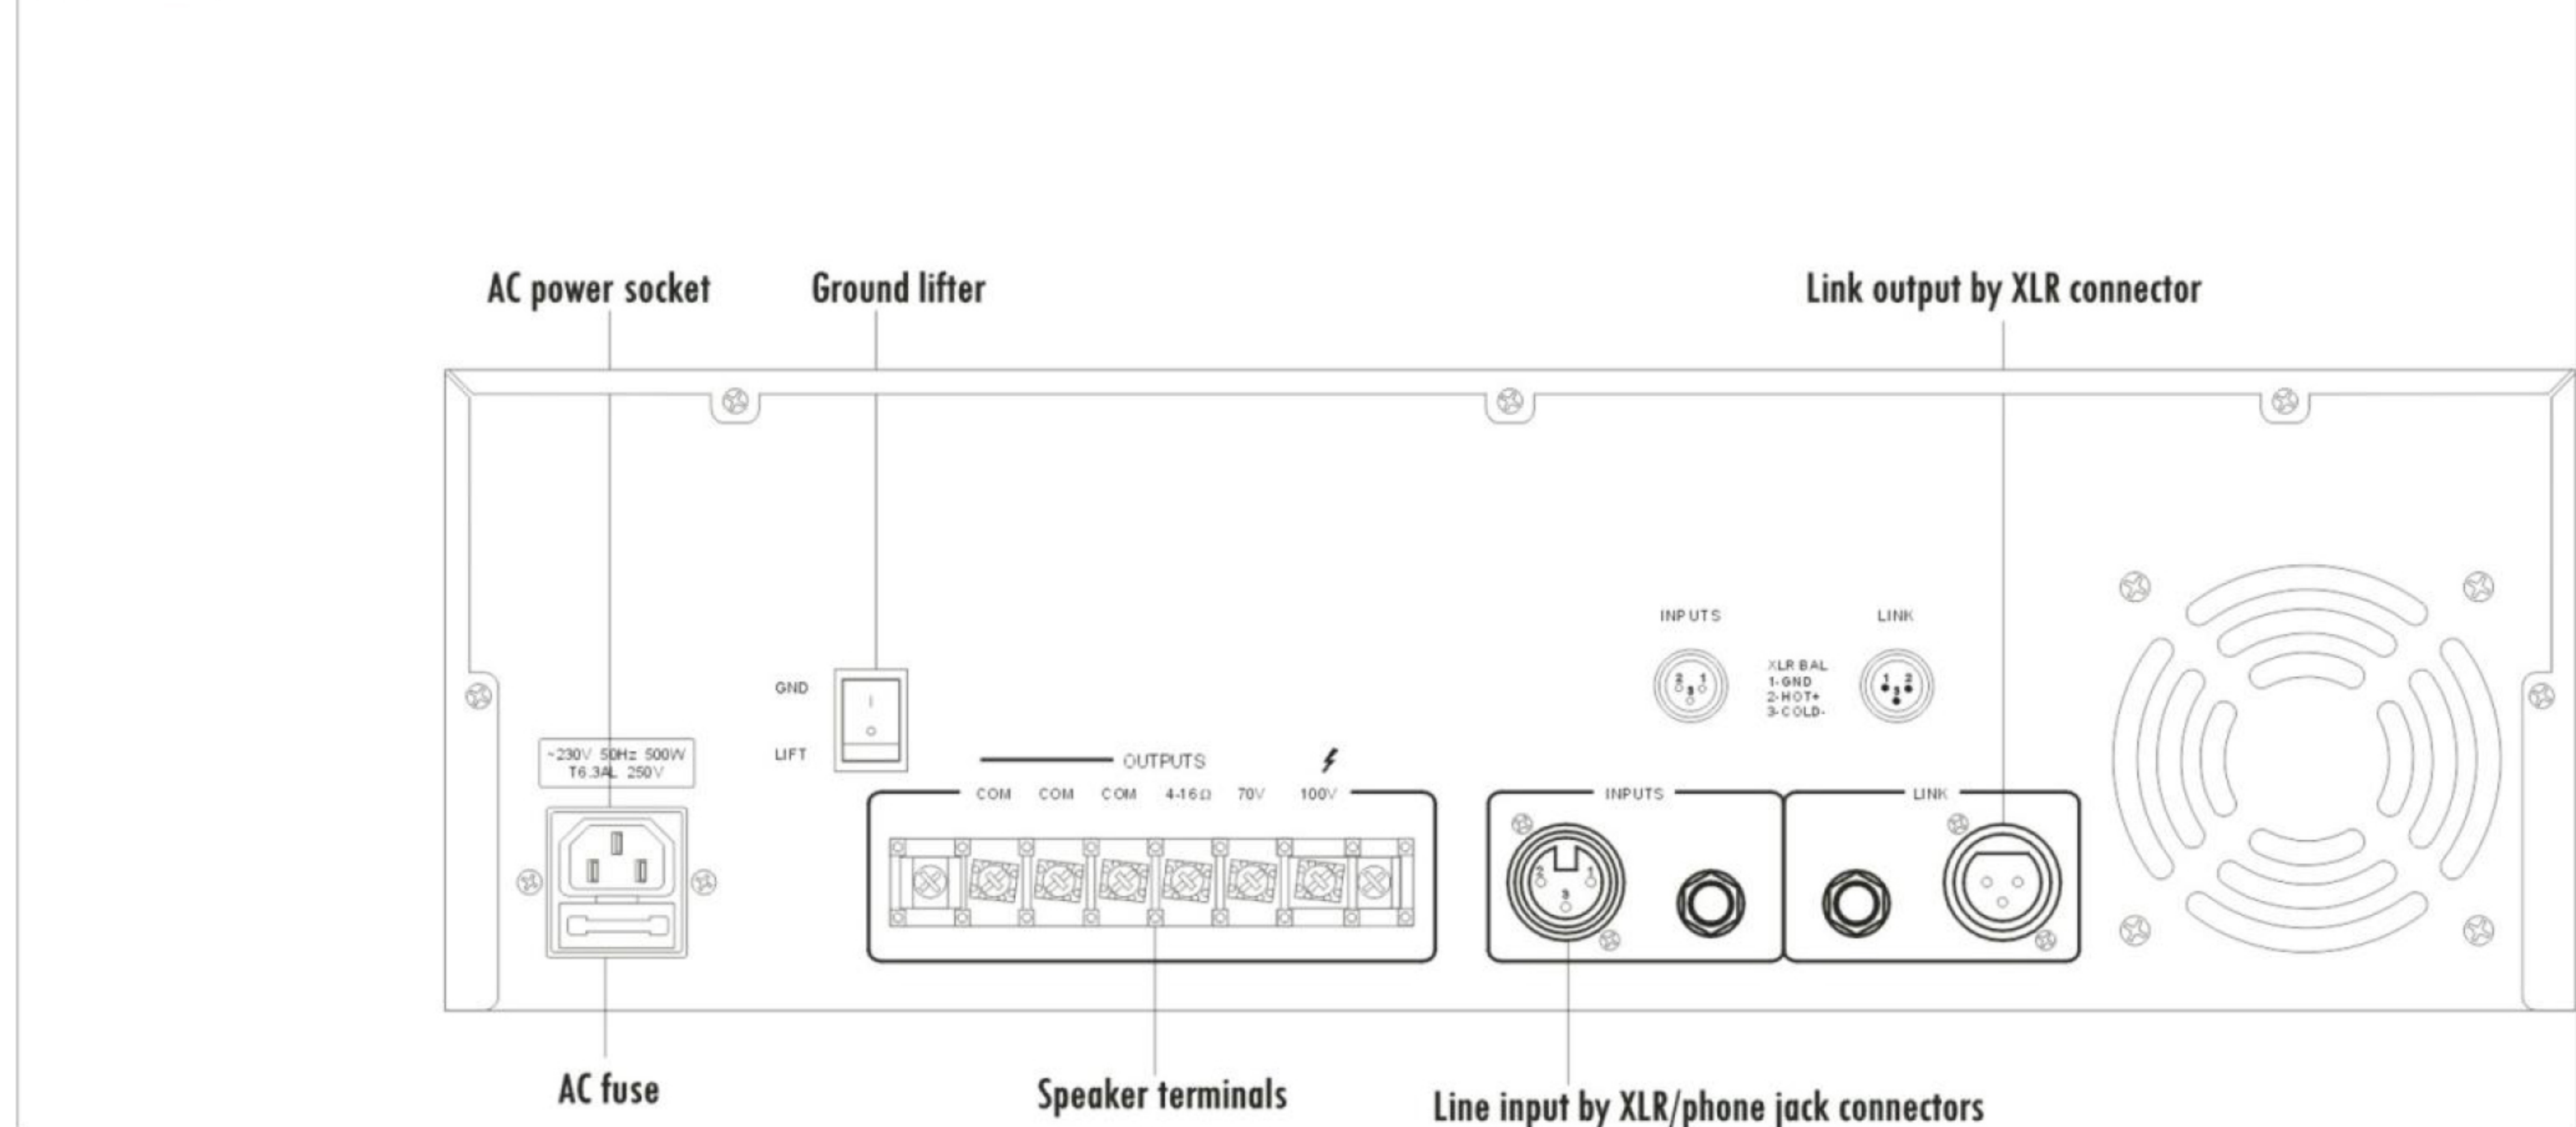

Connections

