



# Dual-directional Projection Loudspeaker

Model Number: KNL29-10W



## Key Features

- Bidirectional Sound Transmission: Optimized for long-distance sound projection,minimizes crosstalk to ensure minimal disruption for inhabitants.
- 360°Adjustable Angle:With a U-shaped portable bracket,the angle can be adjusted up to 360 degree.
- Versatile Installation for Tunnels:Designed for optimal installation and use in pedestrian corridors and various tunnels.


## Specification

Model No	KNL29-10W
Sensitivity(1m/1W)	86±3dB
Dimension	Φ138mm x 200mm
Material	ABS
Frequency response	180Hz-16KHz
Woofer Speaker Size	2*5" full range speaker
Rated power	10W
Power Options	2.5W/5W/10W
Input voltage	100V
Grille	powder Coated Iron Mesh
Voice Coil Size	Φ0.12*2 Layer
Product Weight	1.7Kg

Impedance	6.8Ω
Voice Coil Frame	Paper
Magnet	Ferrite
	φ60*φ32*15(Y30)
Basket	Iron
Diaphragm Material	Paper
Diaphragm	Fabric
Dust Cap	Mylar

## System Network Diagram

### Public Address System

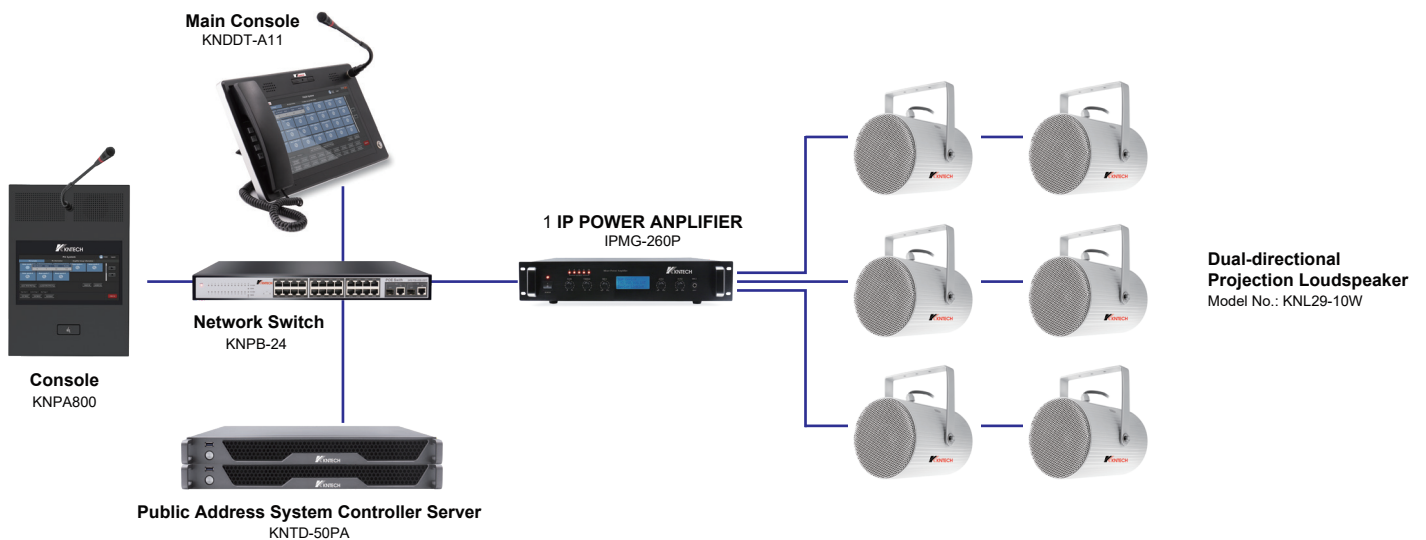


## Picture



## Size Display

Unit: mm

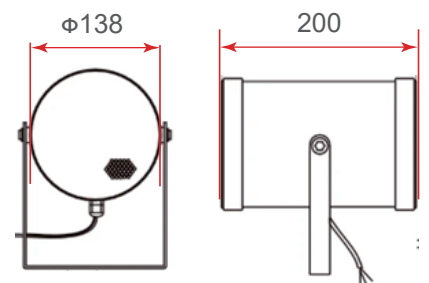

Web: [www.koontech.com](http://www.koontech.com)

Email: [marketing@koontech.com](mailto:marketing@koontech.com)

Tel: (HK Office) +852 9068 2799 / (Shenzhen Office) +86 755 2744 8753

Shenzhen Office: 1001 Block A Building T3, Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTech Building, Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China