



VOIP KNSP-15MT_L-IP-R Loudspeaker Phone

DESCRIPTION ITEM NO.

1. Robust aluminium alloy die-cast body, Vandal resistant and tamper-resistant hardware, simple installation.
2. Full keypad with memory, 1 button programmable ,support free dial.
3. With external 30W loud speaker.Material:metal. Impedance:8Ω.Freq.Resp:300-7000HZ.
S.P.L:(1M/W):108dB. Megenet:ALum
4. With red flash Light. Work voltage: 12V DC/10W
5. DC input overvoltage overcurrent protection and RJ 45 surge protection.
6. Heavy Duty handset with hearingAid compatible(HAC) receiver,Noisecanceling microphone.
9. Door cover: orient automatically and good self - closing, convenient for use.
- 10.Temperature range from -40 degree to +70 degree.
11. Support echo cancellation.
12. Remote software upgrade, configuration and monitoring.
13. Optional 7 minute time-limited call.(This function upon buyer's requirement).
14. Powder coated in UV stabilized polyester finish.
15. Application: Tunnel, metro, railway, LRT, speedway, marine, ship,offshore, mine, power plant, bridge etc.



SPECIFICATION

VoIP SIP2.0 telephone
MTBF:100000hours
Free dial (maximum length of each number is 16 digits)
Communication: Full duplex 2-way hands-free communication
Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)

DTMF dialing
MTTR: 2 hours

Local power, Input : AC 110V or AC 220V

Audio Codes:G.711, G.723, G.726,G.729
Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better
IP Protocols:IPv4, TCP, UDP, RTP, DHCP, SIP.
2 x LAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)
Programming:Non-volatile flash memory programming and configuration through Web GUI
Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring.
Echo cancellation code:G.167/G.168

Order information:

Model number	Power Supply	Item Number
KNSP-15MT_L-IP-R_T110	AC110V	SP15M0062
KNSP-15MT_L-IP-R_T220	AC220V	SP15M0041

*T110---AC 110VTransformer with Tripod flat / octagonal


*T220---AC 220VTransformer with Tripod flat / octagonal

CERTIFICATION

Australian communications:AS/CA S004
Australian Equipment-safety: AS/NZS 60950.1:2015
RCM: AS/NZS CISPR 32
EMC:EN55032, EN55024,EN61000-3-2.



INSTALLATION

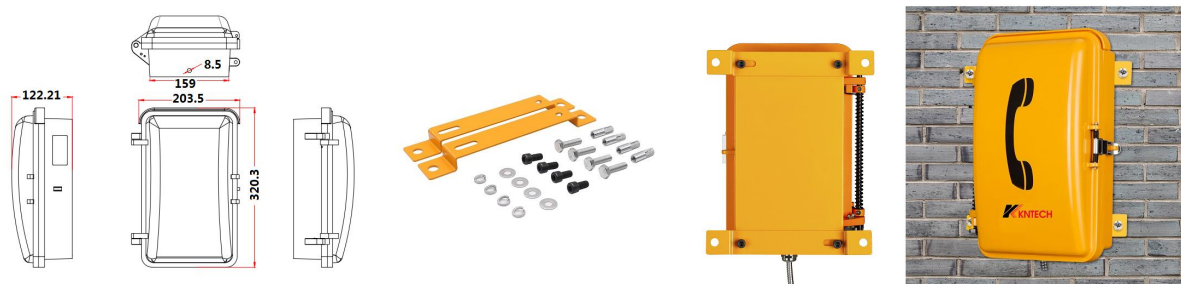

PACKAGING

Unit size: 320 *205 *120mm N.W: 5.8KG+喇叭 1.5KG +灯 0.33KG

1pcs packing box size: 439 *277 *191mm Unit N.W:6.8KG +1.5KG + 灯 0.33KG

6pcs in 1 outer Carton box: size: 730*390*340mm N.W: 42KG+10.5KG + 灯 2KG

