

Wireless Hand-Free Emergency call telephone

Model: GSM KNEM-27



GSM TELEPHONE
SOLAR POWERED

Both Handset type and hand-free type available

Main Features:

1. Metal body, solid and temperature bearable
2. Handset free, With or without keypad optional. With 2 units of built in loudspeaker on the top ,
3. With Dual Cards Dual Standby function, 5 group of speed call button. Heavy duty Vandal resistant buttons.



HONGKONG KOON TECHNOLOGY LTD

6th/f 268th factory Nanchang Ind. park gushu boan SZ China
Tel: 0086755 29790158 / 29127300 Fax:0086755 29790278
Email:jenny@koontech.com www.koontech.com

4. With wireless camera on the top to view the onsite environment via PC or Mobile Handset
5. Lightning protection standard to ITU-T K21
6. Waterproof grade about IP55
7. Body with grounding connection protection
8. Support hotline call, self stop if the other side hang up.
9. Built-in loud speaker, noise canceling microphone
10. Lighting will flash when there is a incoming call
11. AC 110v/220v powered or built-in rechargeable battery with solar powered panel optional
12. The design is super thin and smart. Embed style and hanging style can be chosen.
13. Time out function optional
14. Colours: RED + Stainless steel , If the qty over 100pcs can be To customer specification


Applications:

As Public telephone for outdoor, Taxi or bus stands or station, Highway call box. Railway, Port, Dock, Generation facilities....A good ideal telephone for use in wet or corrosive atmospheres

Specification:

1. **Network Interface:** GSM Frequency : 850/900/1800/1900MHZ
2. **Ringng:** Through internal Speaker/ringer
3. **Power Supply:** Re-chargeable Battery powered: 9V/14Ah, Solar back-up: 12V/30W
4. **Time out:** selectable 0-20 minutes
5. **Temperature:** -20℃~ +60℃
6. **Relative Humidity:** up to 90%
7. **Built-in battery Standby:** 21days
8. **Built-in battery talking time:** 21 hours

Telephone layout

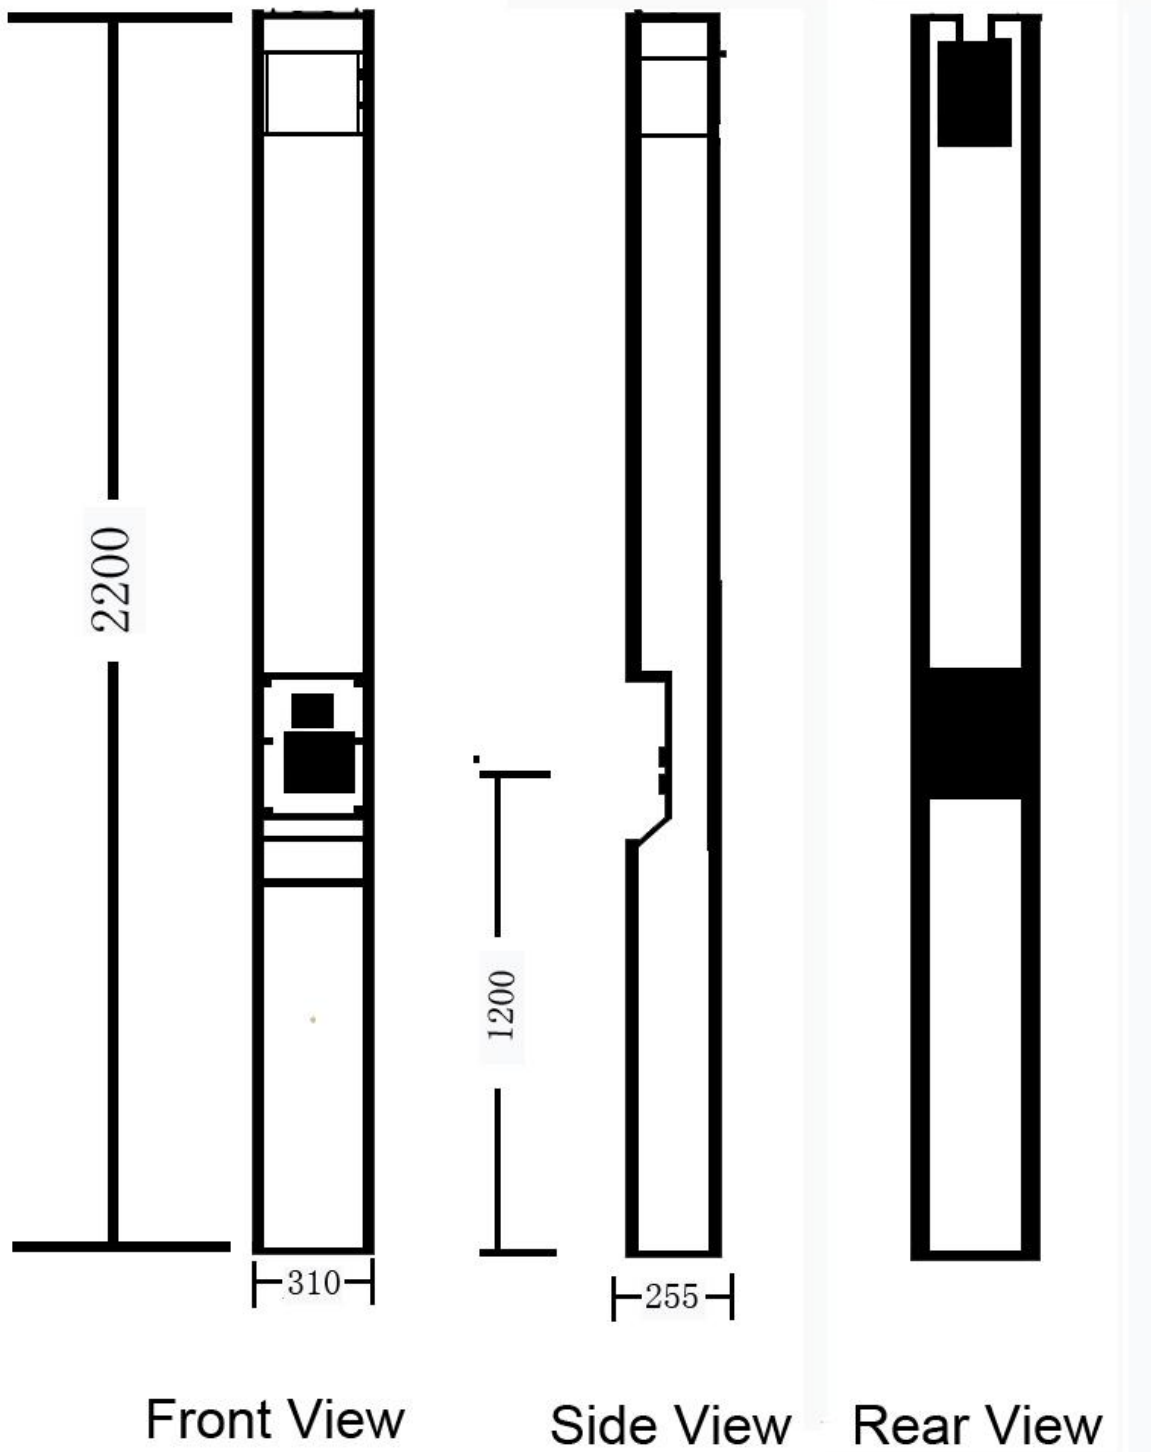

Solar panel over 600mm high

1.5 Certification:



IP55



EMC: EN50121 (Railway application- Electromagnetic Compatibility)



HONGKONG KOON TECHNOLOGY LTD

6th/f 268th factory Nanchang Ind. park gushu boan SZ China
Tel: 0086755 29790158 / 29127300 Fax:0086755 29790278
Email:jenny@koontech.com www.koontech.com

EN55022: emissions EN55024: immunity

Ingress Protection: GB4208-93 IP67

FCC

ITU-T Recommendations K21

Telephone Unit size: 2500*310*255mm Unit Net weight: 90kg

1pcs in a wooden box CTN box, size: 2530X630X450cm G.W: 186kg

20GP: 88PCS 40GP: 176PCS 40HQ: 205PCS

