

Analogue KNSP-18 Waterproof Telephone



DESCRIPTION ITEM NO.:SP0180012

1. Robust SMC 2600 glass fibre reinforced polyester die-cast body, Vandal & tamper-resistant hardware, easy Installation.
2. Waterproof rating IP66 dust proof.
3. Full keypad 0~9 with hand-free, redial, speed-dial.
4. LCD display show the dialing number.
5. Weather resistant to IP66 standard, service temperature range from -30 degree to +75degree.
6. Magnetic reed hook-switch.
7. Lightning protection to ITU-T recommendation K.21.
8. Heavy Duty handset with hearing Aid compatible receiver, Noise canceling microphone.
9. Handset with industrial strong armored cord .
10. Stainless steel keypad keep waterproof and dusty proof.
11. Phone integrity wiring to enable the telephone system to check if the telephone unit is still operational.(if PABX have this available we can provide this function).
12. Optional 7 minute time out to release the line if the handset is left off hook. This function upon buyer's requirement).
13. Powder coated in UV stabilized polyester finish.
14. Application: Tunnel, metro, railway, LRT, speedway, marine, ship, offshore, mine, power plant, bridge etc.



SPECIFICATION

PSTN analogue telephone

MTBF: 100000hours

MTTR: 2 hours

DTMF dialing

Communication: Full duplex 2-way handset communication

Connection: RJ11 screw terminal pair cable

Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.

Ambient temperature: -30 ~ +60 degree. Relative humidity:10%~95%

Atmospheric pressure: 86~106Kpa Circumstance noise:less than60dB(A)

Sound level of ringing: over 70dB(A).

Standard frequency: low frequency group:697. 770. 852. 941Hz,

high frequency group:1209. 1336. 1477Hz, frequency deviation:-1.5% ~ +1.5%

Call transmission index: (5KM)SLR<12,RLR<-1,STMR>10, output impedance is 600 Ohm.

maximum distance: 7KM

Connection: RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request) with stainless steel cable protected.

CERTIFICATION



PACKNG

Unit size: 290 *205*117mm N.W: 3.9KG


1pcs packing box size: 439 *277 *191mm N.W: 3.9KG G.W: 5.7KG

6pcs in 1 outer Carton box: size: 730*390*340mm N.W: 23.4KG G.W: 29.6KG




INSTALLATION

Unit: mm

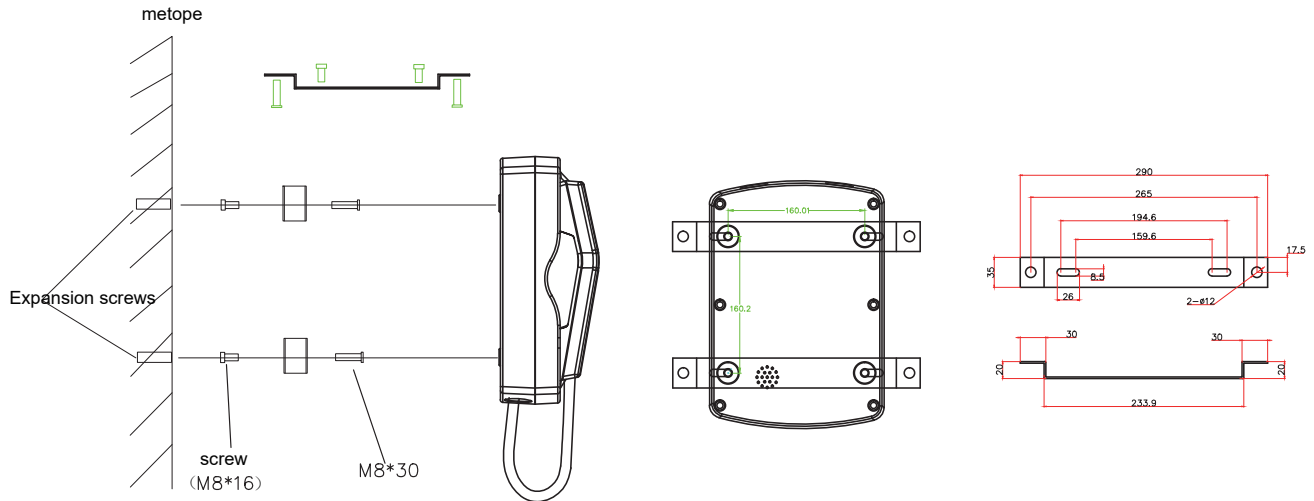

Dimension

Unit: mm

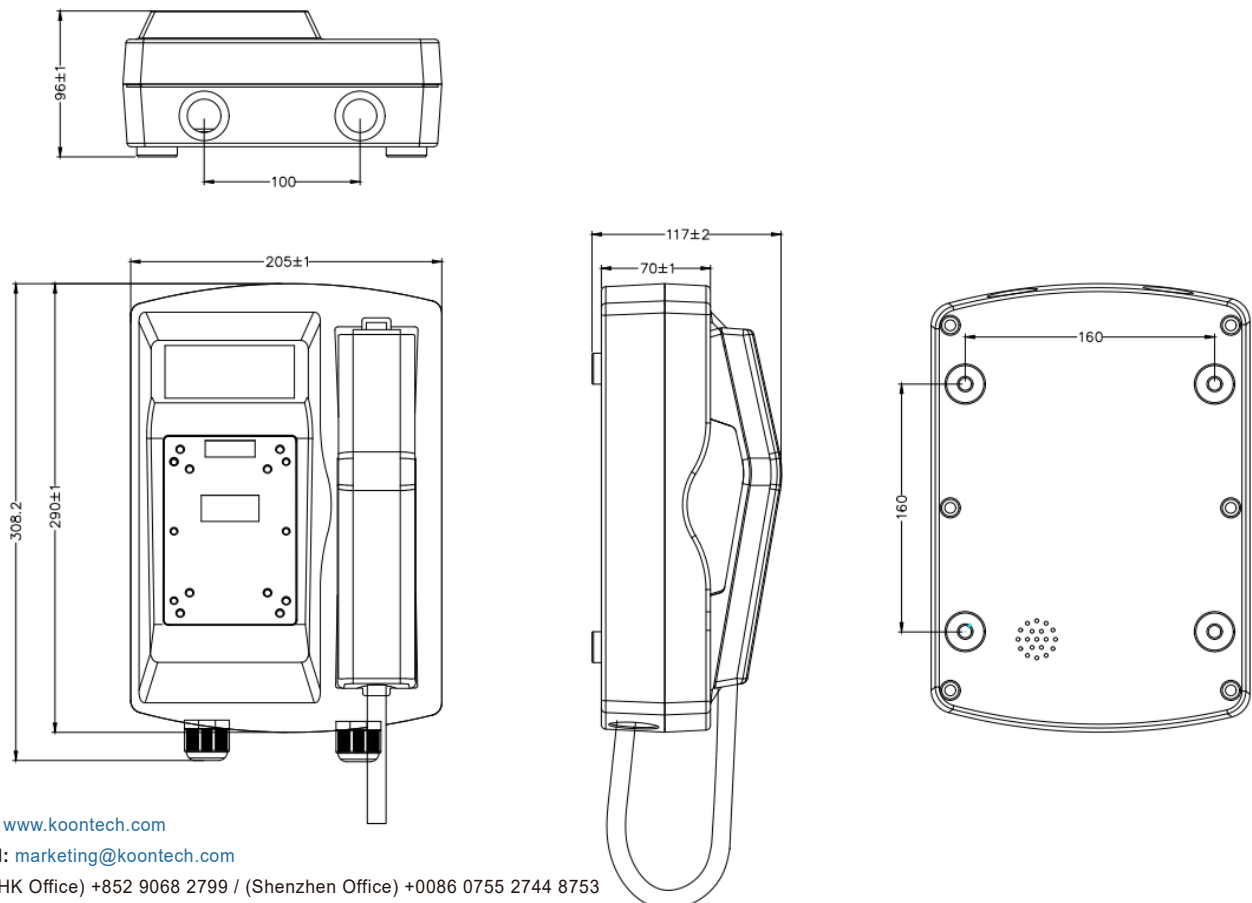

Web: www.koontech.com

Email: marketing@koontech.com

Tel: (HK Office) +852 9068 2799 / (Shenzhen Office) +0086 0755 2744 8753

Shenzhen Office: T3 1001, Yifang Center, Baoan, Shenzhen, China

HK Office: Unit C5, 11/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTech Building, Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China