



# Analogue KNZD-03 Corrosion proof Phone

# **DESCRIPTION ITEM NO.:ZD0030012**

- 1. Stainless steel 304 body, easy Installation.
- 2. Waterproof rating IP65 dust proof.
- 3. Hands-free, with built-in loudspeaker.
- 4. Weather resistant to IP65 standard, service temperature range from -30 degree to +75 degree.
- 5. Lightening protection to ITU-T recommendation K.21.
- 6. Metal keypad keep waterproof and dusty proof.
- 7. Wall mounted type installation
- 8. Auto release the line if the other side not end the call. This function upon buyer's requirement).
- 9. Body in electrophoresis process finish no fingerprint. Resistant to corrosion
- 10. Telephone line powered, RJ11 twisted pair cable connection.
- 11. Application: Clean room, pharmaceutical factory, hospital, chemical plant, metro etc.




### **SPECIFICATION**

1.PSTN analogue telephone2. DTMF dialing3. MTBF:100000hours4. MTTR: 2 hours

- 5. Connection: RJ11 screw terminal pair cable
- 6. Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.
- 7. Ambient temperature:-30 ~ +60 degree. Relative humidity:10%~95% Atmospheric pressure: 86~106Kpa Circumstance noise:less than 60dB(A)
- 8. Sound level of ringing:over 70dB(A).
- Standard frequency:low frequency group:697. 770. 852. 941Hz,
  high frequency group:1209. 1336. 1477Hz, frequency deviation:-1.5% ~ +1.5%
- Call transmission index:(5KM)SLR<12,RLR<-1,STMR>10, output impedance is 600 Ohm. maximum distance: 7KM
- 11. Super strong function is available for free dialing (maximum length of each number is 16 digits).
- 12. Connection: RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request) with stainless steel cable protected

#### **INSTALLATION**

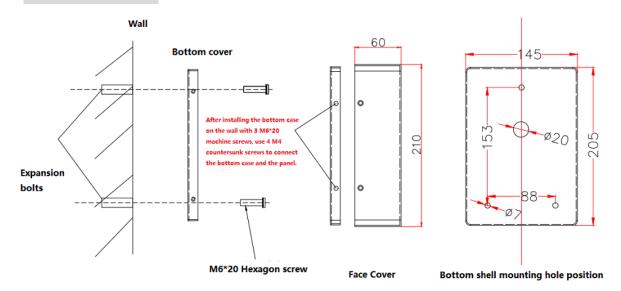

## **CERTIFICATION**

EN55022: emissions EN55024: immunity

Ingress Protection: GB4208-93 IP66 FCC ITU-T Recommendations K21

EMC: EN50121(Railway application-Electromagnetic Compatibility)





# **PACKING**



Machine size:210\*150 \*60( mm ) Carton size:230 \*170 \*80( mm )

Gross weight:1.7KG Net weight:1.5KG

14pcs in 1 outer Carton box: size: 730\*390\*340mm N.W:18KG G.W:24KG