



**VoIP KNZD-30-IPIL Help Point**

**DESCRIPTION ITEM NO.ZD0300022**

1. Stainless steel 304 body, vandal & tamper-resistant hardware, easy installation.
2. Waterproof rating IP55 dust proof.
3. Support induction loop. (optional)
4. Hands-free buttons, built-in 3W loudspeaker.
5. Lightening protection to ITU-T recommendation K.21.
6. POE power supply or DC12V powered.
7. Temperature range from -40 degree to +70 degree.
8. Support echo cancellation and wall mounted.
9. Remote software upgrade, configuration and monitoring.
10. Optional 7 minute time out to release the line if the handset is left off hook. (This function upon buyer's requirement).
11. Body in electrophoresis process finish no fingerprint, resistant to corrosion.
12. Application: Metro, railway, LRT, speedway, bank, university, hotel, clean room, hospital, elevator etc.



## SPECIFICATION

VoIP SIP2.0 telephone                      DTMF dialing  
 MTBF:100000hours                      MTTR: 2 hours  
 Hotline(maximum length of each number is 16 digits)  
 Communication: Full duplex 2-way hands-free communication  
 Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)  
 Power:Power over Ethernet, IEEE802.3af, Class 0  
 Local power, 12VDC,Idle 2W, Max 10W  
 Auxiliary Contacts:1 Aux Output, dry contact  
 Contact Ratings. Load: Resistive load  
 Rated load:0.3 A at 125 VAC; 1 A at 30 VDC  
 Rated carry current:1A  
 Max.switching voltage:125 VAC,60VDC  
 Max.switching current:1A

Audio Codes:G.711, G.722, G.729  
 Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better  
 IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP  
 LAN Protocols:Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)  
 Programming:Non-volatile flash memory programming and configuration through Web GUI  
 Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring, status LED  
 Echo cancellation code:G.167/G.168

## CERTIFICATION

RCM: AS/NZS CISPR 32                      Australian communications:AS/CA S004  
 Australian Equipment-safety: AS/NZS 60950.1:2015  
 EMC: EN50121(Railway application-Electromagnetic Compatibility)




## PACKING



Unit size: 212\*138\*43mm                      Unit: N.W.:1.3KG  
 1pcs packing box size: 260\*180\*90mm                      Unit G.W.:1.5KG  
 6pcs in one carton size: 640\*340\*240mm                      G.W.: 10.5KG

# INSTALLATION

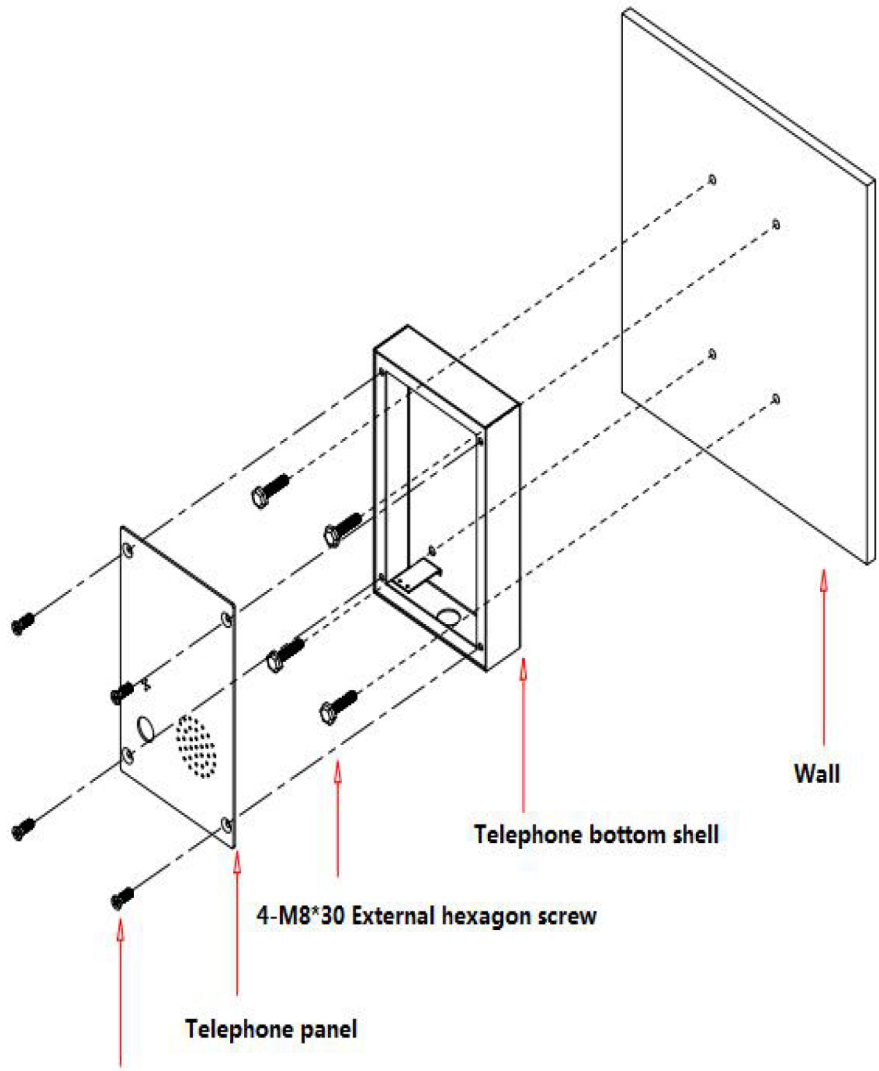

4-M5\*20 Cross countersunk head screw

Unit:mm

