




Dispatching Telephone KNZD-59

KNZD-59 is an electronic intercom system which can keep high-fidelity in any window to chat. It adopts United States' most advanced chips with unique design and the stringent quality management. It reaches the highest standard performance in sound quality, volume, anti-jamming, anti-whistle... It is widely used in bank, hospital, station, control room and so on..

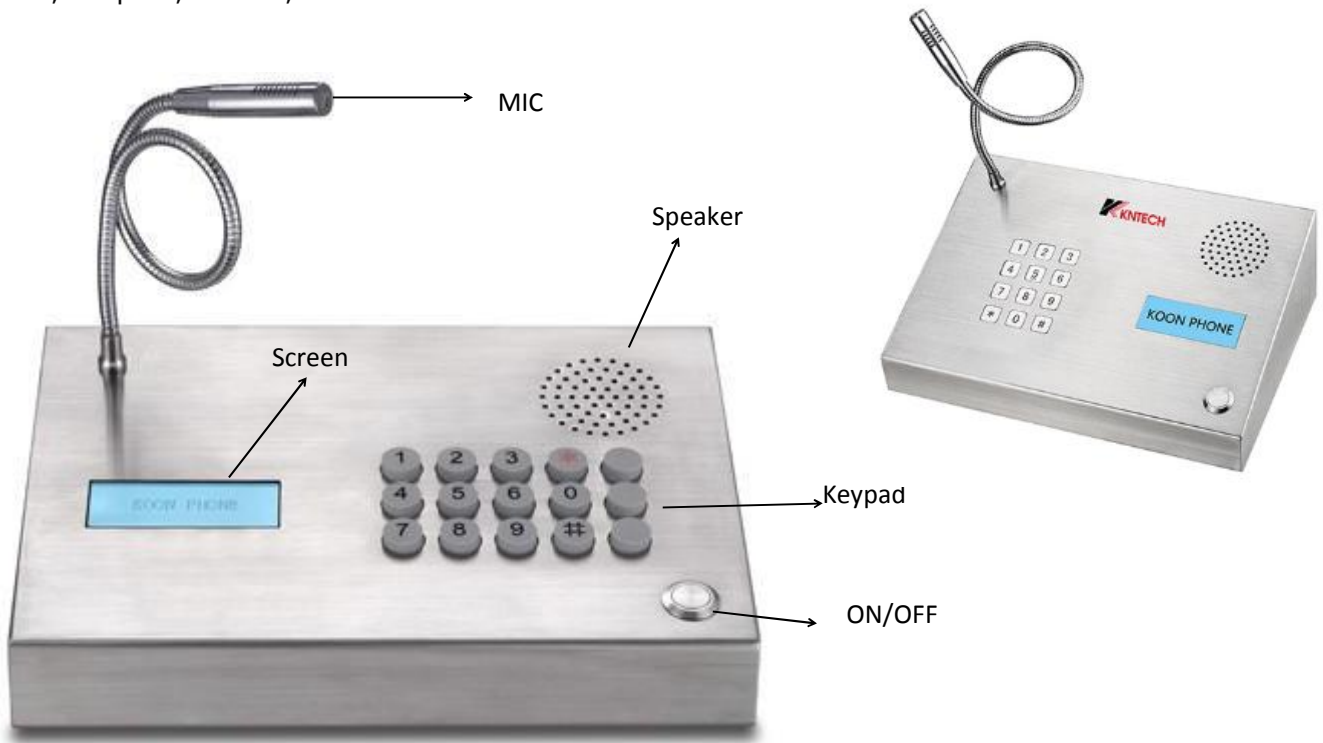

Main Features:

Matching with most IP PABX, PBX and PAX systems.

1. Main body with whole stainless steel body, solid and temperature bearable
2. Handset free, 3w loudspeaker,
3. Resume lightning proof protection automatically standard to ITU-T K21
4. Waterproof grade is IP55
5. The metal shell is provided with grounding connection device and is absolutely insulated with inner circuit and electric , then has the effect of electromagnetism shield.

6. Support hotline call, can realize ring off automatically if the other side close.
7. Totally adopt SMTC craftwork keep very good quality.
8. The design is super thin and smart. Embed style and hanging style can be chosen.
9. Every call is limited(set by five minutes), auto ring off if time exceeded. (Optional)
- 10.The telephone has passed the certificate of ISO9000(2000)
11. Support speed dial with free dial simultaneously. Speed dial 10 groups or 3 groups optional.

LCD Display

Caller ID

Date

time

Dialing number

Conversation time counting

Can add or Minus function according to buyer's need

Specification:

Main technical indexes:

1. Applicable for various types of SPC exchange and dispatching exchange system with feeding voltage of 48-69V.
2. Ambient temperature: -30 ~ +60 degree Relative humidity: 10%~95% Atmospheric pressure: 86~106Kpa
Circumstance noise: less than 60dB(A)
3. Sound level of ringing: over 70dB(A).
4. Standard frequency: low frequency group: 697. 770. 852. 941Hz, high frequency group: 1209, 1336, 1477Hz,
frequency deviation: -1.5%~+1.5%

If service line is a 3Km signal-level:

Standard frequency: low frequency group: -12dB~-6dB, high frequency group: -10dB~-4dB, level difference between low and high frequency of compound signal: 1dB~3dB, the total distortion caused by intermodulation of harmonic wave is lower than the basic level by at least 20dB.

5. Call transmission index: (5KM)SLR<12, RLR<-1, STMR>10, output impedance is 600 Ohm.

6. Super strong function is available for dialing 12 groups of numbers stored in the memory (maximum length of each number is 16 digits)

Packaging Details:

Machine size: 280 * 193.2 * 86.1 mm

Packaging material: pearl cotton, carton



Installation:

