HONGKONG KOON TECHNOLOGY LIMITED

Wireless Hand-Free Emergency call telephone

Wireless Hand-Free Emergency call telephone

Model: GSM KNEM-26

Main Features:

- 1. Metal body, solid and temperature bearable.
- Handset free, With or without keypad optional. With 2 units of built in loudspeaker on the top.
- With Dual Cards Dual Standby function, 5 group of speed call button. Heavy duty Vandal resistant buttons.
- With wireless camera on the top to view the onsite environment via PC or Mobile Handset.
- 5. Lightning protection standard to ITU-T K21.
- 6. Waterproof grade about IP55.
- 7. Body with grounding connection protection.
- 8. Support hotline call, self stop if the other side hang up.
- 9. Built-in loud speaker, noise canceling microphone.
- 10. Lighting will flash when there is a incoming call.
- AC 110v/220v powered or built-in rechargeable battery with solar powered panel optional.
- The design is super thin and smart. Embed style and hanging style can be chosen.
- 13. Time out function optional.
- 14. Colours: RED + Stainless steel , If the qty over 100pcs can be To customer specification.

Applications:

As Public telephone for outdoor, Taxi or bus stands or station, Highway call box. Railway, Port, Dock, Generation facilities....A good ideal telephone for use in wet or corrosive atmospheres.

Specification:

Network Interface	GSM Frequency: 850/900/1800/1900MHZ
Ringing	Through internal Speaker/ringer
Time out	selectable 0-20 minutes
Temperature	-20 ℃~ +60 ℃ emp
Relative Humidity	up to 90%
Built-in battery Standby	21 days
Built-in battery talking time	21 hours
Power Supply	Re-chargeable Battery powered: 9V/14Ah, Solar back-up: 12V/30W








HONGKONG KOON TECHNOLOGY LIMITED

Wireless Hand-Free Emergency call telephone

Mounting bracket



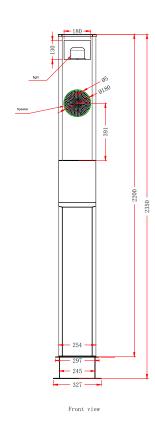



Packing detail

Unit size: 2200*310*255mm, N.W:90kg

2pcs in a wooden box CTN box, size: 35X80X255

G,W:186KG

20GP: 88PCS 40GP: 176PCS

40HQ: 205PCS

Certification







EMC: EN50121 (Railway application Electromagnetic Compatibili-

EN55022: emissions EN55024: immunity Ingress Protection: GB4208-93 IP55

FCC

ITU-T Recommendations K21



Web: www.koontech.com
Email: marketing@koontech.com

Tel: (HK Office) +852 9068 2799 / (Shenzhen Office) +0086 0755 2744 8753

Shenzhen Office: T3 1001, Yifang Center, Baoan, Shezhen, China

HK Office: Unit C5, 11/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong **Factory:** KNTECH Building. Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China