



VoIP KNZD-30-2IPIL Hospital Phone

DESCRIPTION ITEM NO.ZD0300022

1. Stainless steel 304 body, vandal & tamper-resistant hardware, easy Installation.
2. Waterproof rating IP55 dust proof.
3. Support induction loop.(optional)
4. Hands-free button, double loudspeaker.
5. Lightening protection to ITU-T recommendation K.21.
6. POE power supply or DC12V.
7. Temperature range from -40 degree to +70 degree.
8. Support echo cancellation.
9. Remote software upgrade, configuration and monitoring.
10. Optional 7 minute time out to release the line if the handset is left off hook. This function upon buyer's requirement).
11. The housing covered with a layer of reflective label for easy identification at night.Optional
12. Application: Tunnel, metro, railway, LRT, speedway, marine, ship,offshore, mine, power plant, bridge etc.



SPECIFICATION

| | | |
|---|---------------|--|
| VoIP SIP2.0 telephone | DTMF dialing | Audio Codes:G.711, G.722, G.729 |
| MTBF:100000hours | MTTR: 2 hours | Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better |
| Hotline(maximum length of each number is 16 digits) | | IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP |
| Communication: Full duplex 2-way hands-free communication | | LAN Protocols:Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004) |
| Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF) | | Programming:Non-volatile flash memory programming and configuration through Web GUI |
| Power:Power over Ethernet, IEEE802.3af, Class 0 Local power, 12VDC,Idle 2W, Max 10W | | Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring, status LED |
| Auxiliary Contacts:1 Aux Output, dry contact | | Echo cancellation code:G.167/G.168 |
| Contact Ratings. Load: Resistive load | | |
| Rated load:0.3 A at 125 VAC; 1 A at 30 VDC | | |
| Rated carry current:1A | | |
| Max.switching voltage:125 VAC,60VDC | | |
| Max.switching current:1A | | |

CERTIFICATION

RCM: AS/NZS CISPR 32 Australian communications:AS/CA S004
 Australian Equipment-safety: AS/NZS 60950.1:2015
 EMC: EN50121(Railway application-Electromagnetic Compatibility)




PACKING



Unit size:210*135*44mm Unit: N.W:1.2KG
 1pcs packing box size: 230*170*80mm Unit: N.W:1.2KG Unit G.W:1.5KG

INSTALLATION

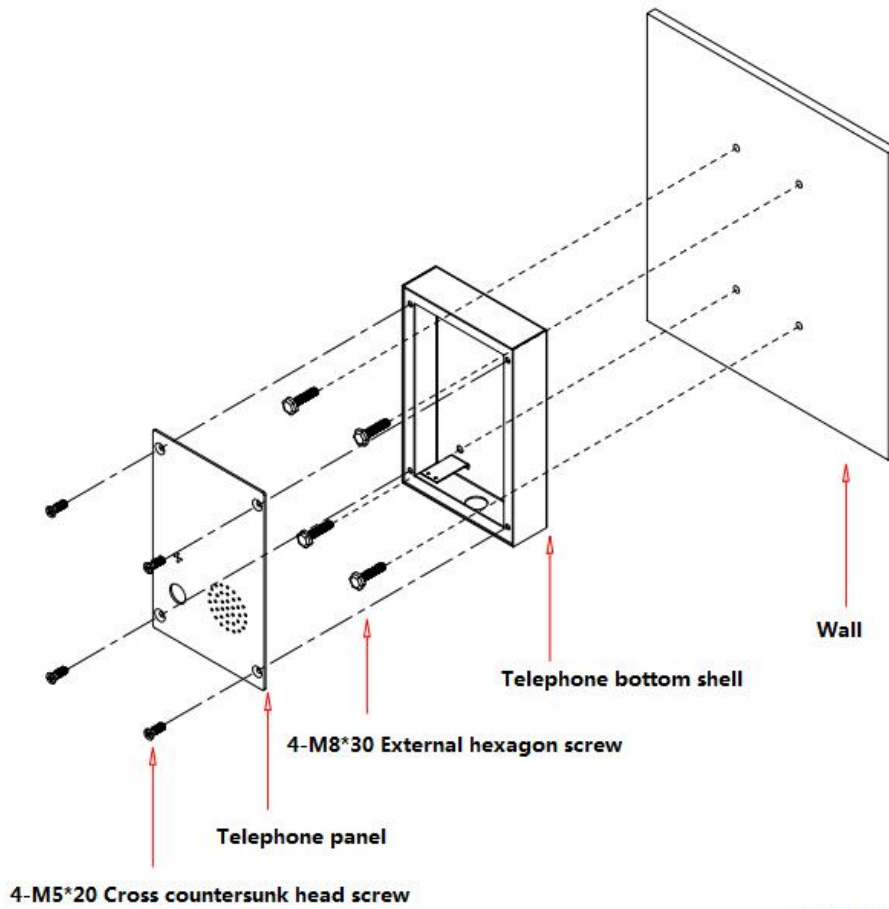

Unit:mm

