



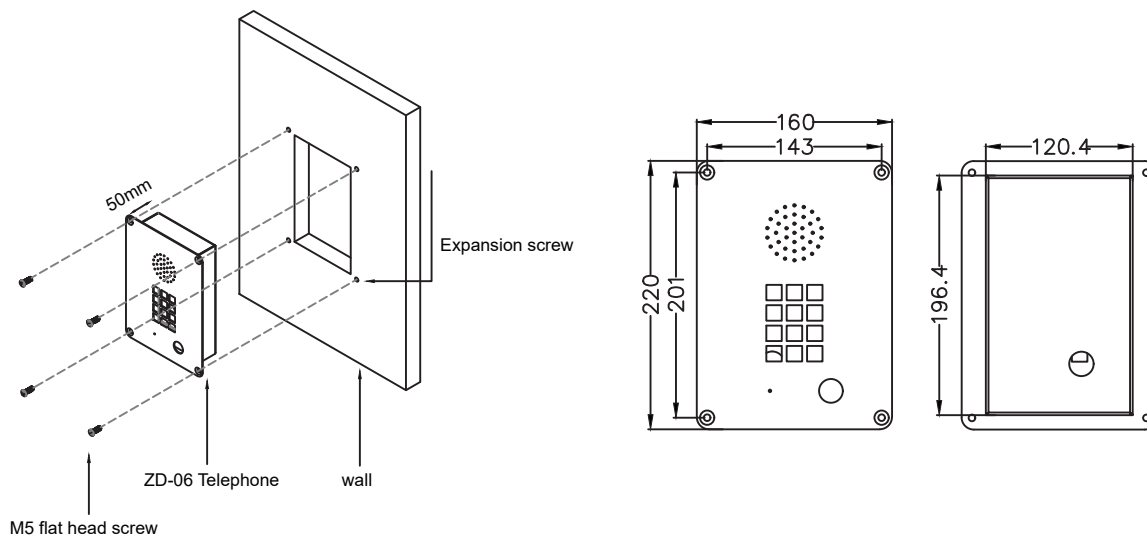
Analogue KNZD-06 Emergency Intercom

DESCRIPTION ITEM NO.:ZD0060012

1. Stainless steel 304 body, easy Installation.
2. Waterproof rating IP65 dust proof.
3. Hands-free, with built-in loudspeaker.
4. Weather resistant to IP65 standard, service temperature range from -30 degree to +75 degree.
5. Lightening protection to ITU-T recommendation K.21.
6. Metal keypad keep waterproof and dusty proof.
7. Flush mounted type installation
8. Auto release the line if the other side not end the call. This function upon buyer's requirement).
9. Body in electrophoresis process finish no fingerprint. Resistant to corrosion
10. Telephone line powered, RJ11 twisted pair cable connection.
11. Application: Clean room, pharmaceutical factory, hospital, chemical plant, metro etc.

SPECIFICATION**ZD0060012**

1. PSTN analogue telephone
2. DTMF dialing
3. MTBF: 100000 hours
4. MTTR: 2 hours
5. Connection: RJ11 screw terminal pair cable
6. Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.
7. Ambient temperature: -30 ~ +60 degree. Relative humidity: 10%~95%
Atmospheric pressure: 86~106Kpa Circumstance noise: less than 60dB(A)
8. Sound level of ringing: over 70dB(A).
9. Standard frequency: low frequency group: 697. 770. 852. 941Hz,
high frequency group: 1209. 1336. 1477Hz, frequency deviation: -1.5% ~ +1.5%
10. Call transmission index: (5KM) SLR < 12, RLR < -1, STMR > 10, output impedance is 600 Ohm.
maximum distance: 7KM
11. Super strong function is available for free dialing (maximum length of each number is 16 digits).
12. Connection: RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request)
with stainless steel cable protected

INSTALLATION**CERTIFICATION**

EN55022: emissions

EN55024: immunity

Ingress Protection: GB4208-93 IP66 FCC

ITU-T Recommendations K21

EMC: EN50121(Railway application-Electromagnetic Compatibility)

**RoHS**

PACKING



Unit size:210*150*60mm Unit: N.W:1.5KG

1pcs packing box size: 230 *170 *80mm Unit N.W:1.5KG Unit G.W:1.7KG

Web: www.koontech.com

Email: marketing@koontech.com

Tel: (Shenzhen Office) +86 755 2744 8753 / (HK Office) +852 9068 2799

Shenzhen Office: 1001 Block A Building T3,Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTech Building. Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China