



VoIP KNZD-06 Emergency Intercom

DESCRIPTION 7D00600??

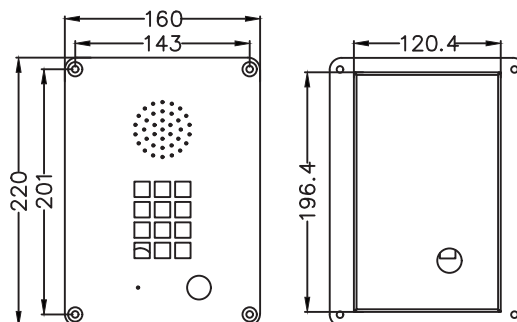
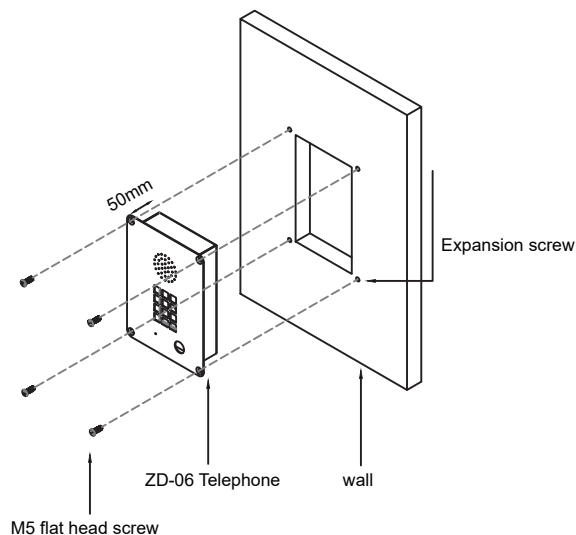
1. Stainless steel 304 body, vandal & tamper-resistant hardware, easy Installation.
2. Waterproof rating IP55 dust proof.
3. Metal keypad keep waterproof and dusty proof.
4. Stainless steel button, built-in 3w loudspeaker.
5. Lightening protection to ITU-T recommendation K.21.
6. POE power supply or DC12V.
7. Temperature range from -40 degree to +70 degree.
8. Support echo cancellation.
9. Remote software upgrade, configuration and monitoring.
10. Flush mounted installation.
11. Optional 7 minute time out to release the line if other side not hang-up. This function upon buyer's requirement).
12. Body in electrophoresis process finish no fingerprint. Resistant to corrosion
13. Application: Metro, railway, LRT, speedway, bank, university, hotel, clean room, elevator etc.

SPECIFICATION

ZD0060022

VoIP SIP2.0 telephone DTMF dialing
MTBF:100000hours MTTR: 2 hours
Free dial(maximum length of each number is 16 digits)
Communication: Full duplex 2-way hands-free communication
Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)
Power:Power over Ethernet, IEEE802.3af, Class 0
Local power, 12VDC,Idle 2W, Max 10W
Auxiliary Contacts:1 Aux Output, dry contact
Contact Ratings. Load: Resistive load
Rated load:0.3 A at 125 VAC; 1 A at 30 VDC
Rated carry current:1A
Max.switching voltage:125 VAC,60VDC
Max.switching current:1A

Audio Codes:G.711, G.722, G.729
Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better
IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP
LAN Protocols:Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)
Programming:Non-volatile flash memory programming and configuration through Web GUI
Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring, status LED
Echo cancellation code:G.167/G.168

PARAMETERS

CERTIFICATIO

RCM: AS/NZS CISPR 32 Australian communications:AS/CA S004
Australian Equipment-safety: AS/NZS 60950.1:2015
EMC: EN50121(Railway application-Electromagnetic Compatibility)



RoHS

PACKING



Unit size:210*150*60mm Unit: N.W:1.5KG
1pcs packing box size: 230 *170 *80mm Unit N.W:1.5KG Unit G.W:1.7KG

Web: www.koontech.com

Email: marketing@koontech.com

Tel: (Shenzhen Office) +86 755 2744 8753 / (HK Office) +852 9068 2799

Shenzhen Office: 1001 Block A Building T3,Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTECH Building. Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China