

## Window Intercom

Model: KNDJ-1



KNDJ-01 is an electronic intercom system which can keep high-fidelity in any window to chat. It adopts United States' most advanced chips with unique design and the stringent quality management. It reaches the highest standard performance in sound quality, volume, anti-jamming, anti-whistle ... It is widely used in bank, hospital, station and so on.


### Key Functional Features & Benefits

#### ■ Purpose-Built Design

- Window intercom KNDJ-1 Main body with whole aluminum alloy with stainless steel, slave using electroplating plastic shell (triangle slave or metal slave optional).
- The master adopts intercom special loudspeaker, and long metal hose microphone (37cm), more convenient to process two-way intercom freely.
- Streamlined external slave with circular design, make it smart, beautiful and elegant. Internal and external connections using a four-core, high-strength pull-resistant, fully shielded foil line, stronger anti-interference, coupled with the installation of stainless steel which retain more appropriate.(Optional aluminum vice machine available).
- Play fidelity, clear, the volume of inner and outer can be individually adjustable with unique dynamic sound indicator.
- Microcomputer processing circuit with mute function can deal with whistler, echo.
- Recording jack can output both inside and outside voice signals (assist the bank teller system for recording).
- Can be used in those places such as bank, post offices, railway stations, insurance companies, hospitals and other places.

## Installation

- The master is installed in the workplace while the slave out of the workplace. Input the attachment plug of slave into cable jack where the slave connects to the master.
- Connect the transformer to the 220V electric power. DC12V plug into the power of the master.
- Switch on the power of master, power indicating red light, said power supply is working correctly.
- The inside and outside volume knob can separately adjust the volume

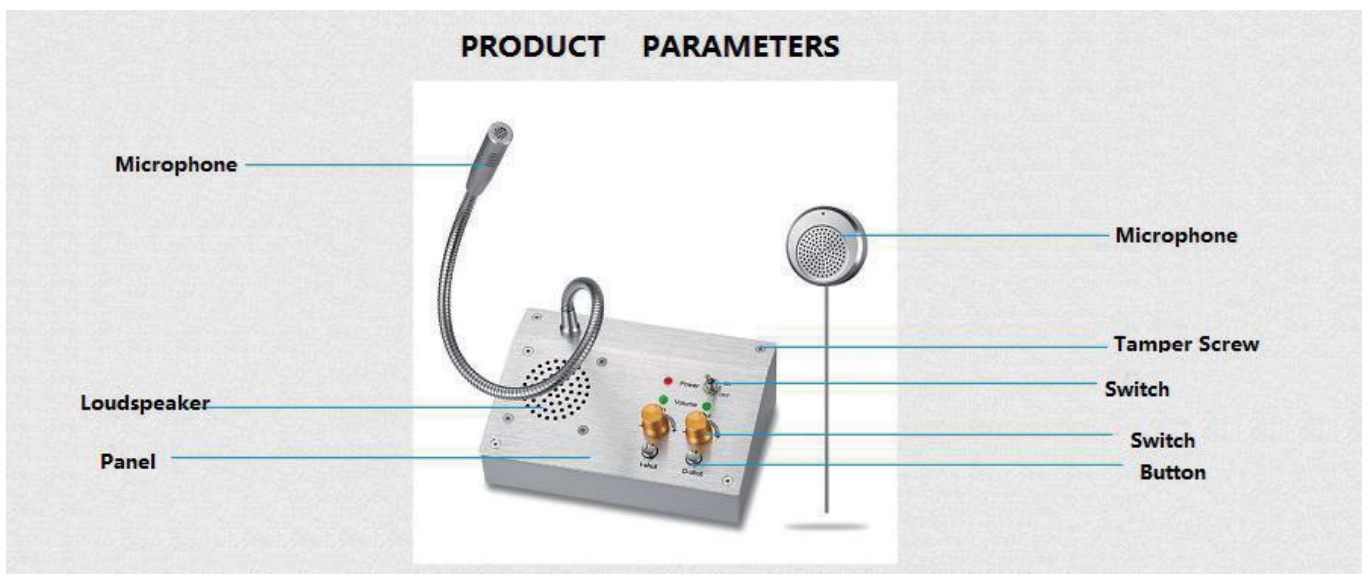

## Specification

Parameter	Description
Model	KNDJ-1
Adapter input voltage	AC220V
Operating voltage	DC12V
Master material	aluminum alloy+stainless steel
Master size	150(L)x103(W)x47(H)mm(excluding microphone)
Slave size	Φ68(D)x18(H)mm
Slave material	plastics

## Certification

RCM:AS/NZS CISPR 32

Australian communications:AS/CA S004 Australian

Equipment-safety: AS/NZS 60950.1:2015


EMC: EN50121(Railway application-Electromagnetic Compatibility)



**RoHS**

## Dimensions

Unit: mm

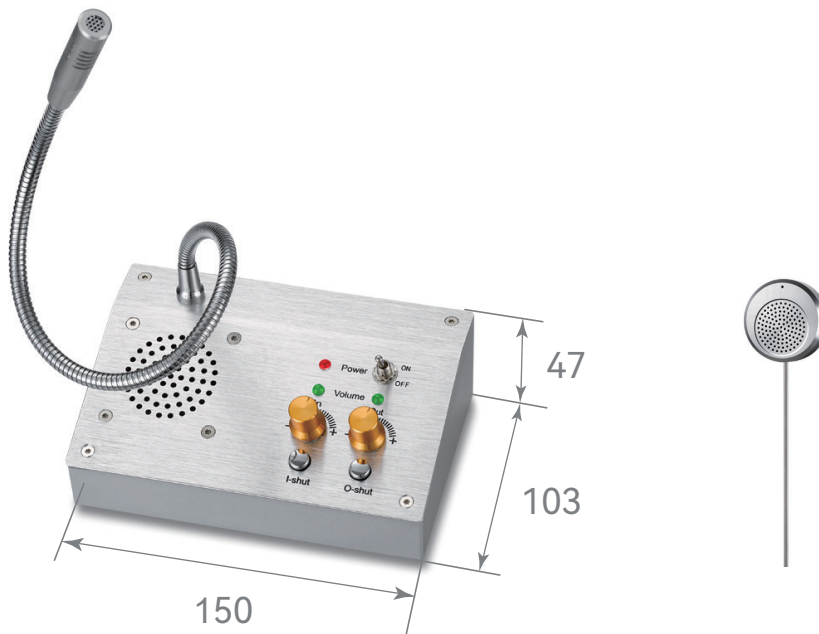

Web: [www.koontech.com](http://www.koontech.com)

Email: [marketing@koontech.com](mailto:marketing@koontech.com)

Tel: (Shenzhen Office) +86 755 2744 8753 / (HK Office) +852 9068 2799

Shenzhen Office: 1001 Block A Building T3, Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTech Building, Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China