



Analogue KNZD-07KLCD auto dial Telephone

DESCRIPTION ITEM NO.ZD07K0012


1. Shell: stainless steel material with high strength and elasticity, wide high impact strength, wide service temperature.
2. Hook: stainless steel, using magnetic induction hang up, don't need hook switch, no contact gaps.
3. Buttons: metal buttons, abrasion-proof and anti aging. (Can be customized back lit keyboard)
4. Display: This model is IP version supports Caller ID or IP address of the display. (Can be customized according to standard GSM CDMA, etc.)
5. Handset: special ABS, / PC synthesis, integrated structure, good sealing, resistance to knock ,twisted pull no deformation, doesn't burst at -35 centigrade.
6. Wire: using Teflon wire, acid and alkali resistance, high temperature, anti-aging, do not catch fire.
7. Waterproof glue : imported waterproof glue, high viscosity, high temperature resistance, high pressure, waterproof life more than 10 years.
8. Transmitter and receiver of handset ,keyboard, buzzer,circuit board ,shell , all accessories use multi-layer waterproof and dust-proof structure. It has three-level waterproof, dust proof functions, the whole rating reach to IP66.
9. Telephone is very stability, strong anti-jamming capability, In line with the national standard GB / T 15279-94.



SPECIFICATION

1. PSTN analogue telephone
2. DTMF dialing
3. MTBF: 100000 hours
4. MTTR: 2 hours
5. Connection: RJ11 screw terminal pair cable
6. Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.
7. Ambient temperature: -30 ~ +60 degree. Relative humidity: 10%~95%
Atmospheric pressure: 86~106Kpa Circumstance noise: less than 60dB(A)
8. Sound level of ringing: over 70dB(A).
9. Standard frequency: low frequency group: 697. 770. 852. 941Hz,
high frequency group: 1209. 1336. 1477Hz, frequency deviation: -1.5% ~ +1.5%
10. Call transmission index: (5KM)SLR<12,RLR<-1,STMR>10, output impedance is 600 Ohm.
maximum distance: 7KM
10. Super strong function is available for dialing 4 groups of numbers stored in the memory
(maximum length of each number is 16 digits)
11. Connection: RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request)
with stainless steel cable protected

INSTALLATION

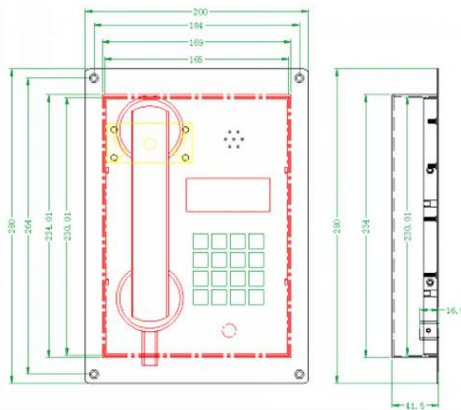

CERTIFICATION

RCM: AS/NZS CISPR 32 Australian communications: AS/CA S004
 Australian Equipment-safety: AS/NZS 60950.1:2015
 EMC: EN50121(Railway application-Electromagnetic Compatibility)



RoHS

PACKING



Unit size: 280*200*41.5mm

Unit: N.W: 2.0KG

1pcs packing box size: 330*180*110mm

Unit N.W: 2.0KG Unit G.W: 2.6KG

2pcs in 1 outer Carton box: size: 350*240*190mm N.W: 5.2KG G.W: 4.72KG



HONGKONG KOON TECHNOLOGY LTD

TEL: 0086755 29790158/27448753 Fax: 0086755 29790278
 Email: marketing@koontech.com www.koontech.com