




Product Specification

Model No: KNHP1

1. Drawing (Unit mm)

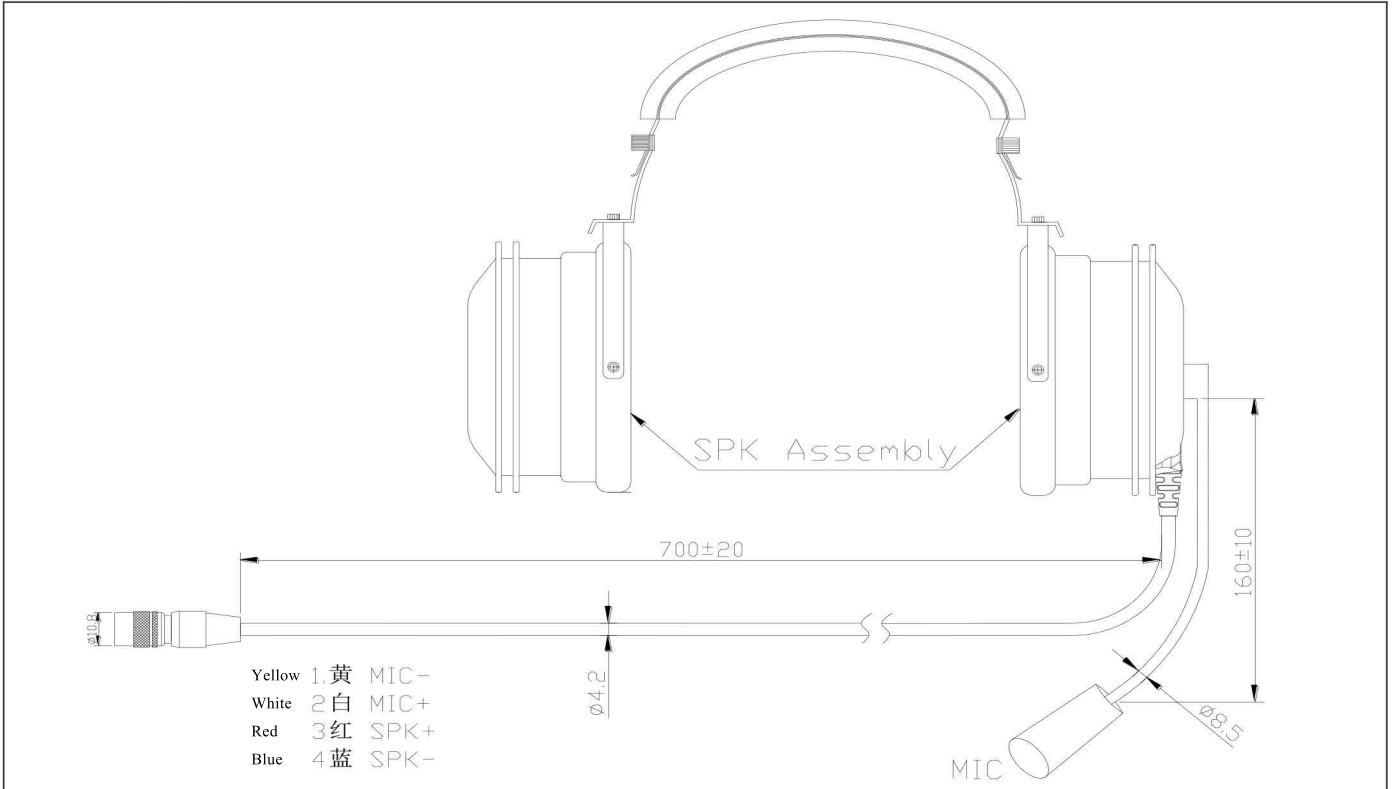

2. Picture



3. Speaker Specification

Type	Transducer Moving coil dynamic speaker
Impedance	32Ω ± 15% @1KHZ
Sensitivity	92dB ± 10%/3.5mW on a coupler
Resonance freq	4KHZ ± 20%
Frequency respond	100-4KHZ
Rated input power	3.5mW
Maximum input power	500mW

4. Microphone Specification

Type	Transducer Moving coil dynamic speaker
Sensitivity Range	-40± 3dB
Impedance Max	2.2KΩ 1kHz (RL=2.2KΩ)
Frequency	100-4KHz
Waterproof degree	IP54