



VoIP KNZD-03LCD Emergency Intercom

DESCRIPTION ZD03L0022

1. Stainless steel 304 body, vandal & tamper-resistant hardware, easy installation.
2. Waterproof rating IP55 dust proof.
3. Metal keypad keep waterproof and dusty proof.
4. Stainless steel button, built-in 3W loudspeaker.
5. Lightening protection to ITU-T recommendation K.21.
6. POE power supply or DC12V powered.
7. Temperature range from -40 degree to +70 degree.
8. Support echo cancellation.
9. Remote software upgrade, configuration and monitoring.
10. With LCD display, shows the caller ID, date, time, dialing number, conversation time counting (Can add or Minus function according to buyer's need).
11. Optional 7 minute time out to release the line if other side not hang-up. (This function upon buyer's requirement).
12. Body in electrophoresis process finish no fingerprint. Resistant to corrosion
13. Application: Clean room, pharmaceutical factory, hospital, chemical plant, metro, LRT, speedway, school, bank, hotel, elevator etc.




SPECIFICATION

VoIP SIP2.0 telephone DTMF dialing
 MTBF:100000hours MTRR: 2 hours
 Free dial(maximum length of each number is 16 digits)
 Communication: Full duplex 2-way hands-free communication
 Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)
 Power:Power over Ethernet, IEEE802.3af, Class 0
 Local power, 12VDC,Idle 2W, Max 10W
 Auxiliary Contacts:1 Aux Output, dry contact
 Contact Ratings. Load: Resistive load
 Rated load:0.3 A at 125 VAC; 1 A at 30 VDC
 Rated carry current:1A
 Max.switching voltage:125 VAC,60VDC
 Max.switching current:1A

Audio Codes:G.711, G.722, G.729
 Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better
 IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP
 LAN Protocols:Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)
 Programming:Non-volatile flash memory programming and configuration through Web GUI
 Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring, status LED
 Echo cancellation code:G.167/G.168

PARAMETERS

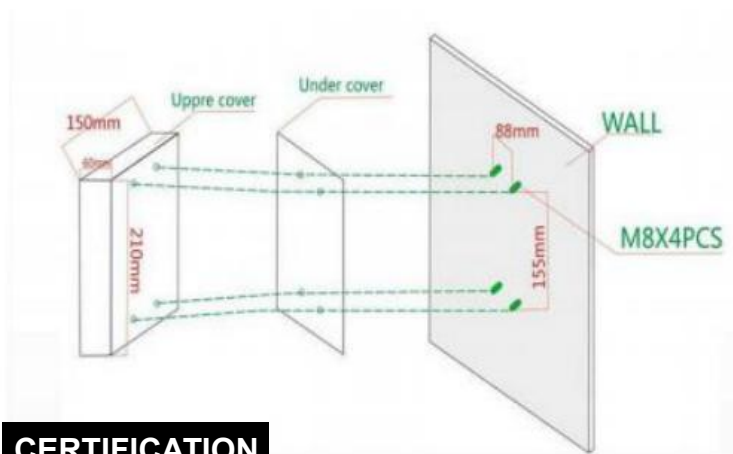

CERTIFICATION

RCM: AS/NZS CISPR 32 Australian communications:AS/CA S004
 Australian Equipment-safety: AS/NZS 60950.1:2015
 EMC: EN50121(Railway application-Electromagnetic Compatibility)



RoHS

PACKING



Machine size: 210*150 *60mm Carton size: 230 *170 *80mm
 1pcs packing box size: 230 *170 *80mm Unit N.W: 1.5KG Unit G.W: 2KG
 14pcs in 1 outer carton box: size: 730*390*340mm N.W: 18KG G.W: 24KG



HONGKONG KOON TECHNOLOGY LTD

TEL:0086755 29790158/27448753 Fax:0086755 29790278
 Email:marketing@koontech.com www.koontech.com