



## VoIP Hospital Telephone

### DESCRIPTION ITEM NO.ZD0630022


1. Plastic material body for easy Installation.
2. Waterproof rating IP55 dust proof.
3. Full keypad with memory, 10 button programmable free-dial telephone.
4. Hands-free button, double loudspeaker.
5. Lightning protection to ITU-T recommendation K.21.
6. POE power supply.
7. Temperature range from -40 degree to +70 degree.
8. Support echo cancellation.
9. Remote software upgrade, configuration and monitoring.
10. Optional 7 minute time out to release the line if the handset is left off hook.  
(This function upon buyer's requirement).
11. The housing covered with a layer of reflective label for easy identification at night.Optional
12. Application: Tunnel, metro, railway, LRT, speedway, marine, ship,offshore, mine,  
power plant, bridge etc.



## SPECIFICATION

VoIP SIP2.0 telephone	DTMF dialing	Audio Codes:G.711, G.722, G.729
MTBF:100000hours	MTTR: 2 hours	Network:10/100 BaseTX Ethernet,
Free dial(maximum length of each number is 16 digits)		RJ45 connectors, Cat5e or better
Communication: Full duplex 2-way hands-free		IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP,
Communication		DHCP, SIP
Call Control Signaling:VOIP SIP Info(DTMF),		LAN Protocols:Power over Ethernet(PoE,802.3af)
RFC 2833(DTMF)		WLAN(IEEE 802.3af), Network Access
Power:Power over Ethernet, IEEE802.3af, Class		Control(IEEE 802.1x),STP(IEEE802.1d),
0 Local power, 12VDC,Idle 2W, Max 10W		RSTP(IEEE 802.1d-2004) Programming:Non-
Auxiliary Contacts:1 Aux Output, dry contact		volatile flash memory programming and
Contact Ratings. Load: Resistive load Rated		configuration through Web GUI Management and
load:0.3 A at 125 VAC; 1 A at 30 VDC		Operation:DHCP and static IP, remote automatic
Rated carry current:1A		software upgrade, centralized monitoring, status
Max.switching voltage:125		LED
VAC,60VDC Max.switching current:1A		Echo cancellation code:G.167/G.168

## INSTALLATION

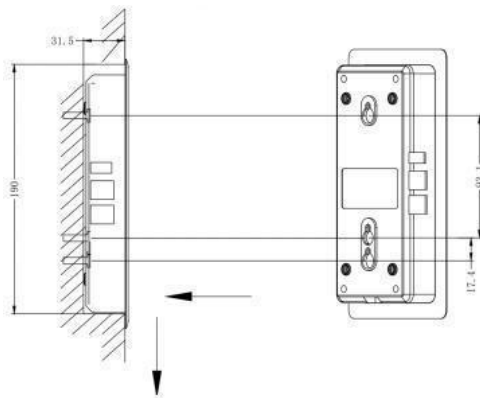



## CERTIFICATION

RCM: AS/NZS CISPR 32      Australian communications:AS/CA S004

Australian Equipment-safety: AS/NZS 60950.1:2015

EMC: EN50121(Railway application-Electromagnetic Compatibility)



**RoHS**

## PACKING



Unit size:105\*205\*32mm Unit: N.W:0.3KG

1pcs packing box size: 33\*14\*9mm Unit: N.W:0.3KG Unit G.W:0.58KG

5pcs in 1 outer Carton box: size: 340\*310\*150mm N.W:1.5KG G.W:1.98KG