



VOIP KNSP-11-IP-Y Railway Phone

DESCRIPTION ITEM NO.

1. Robust aluminium alloy die-cast body, Vandal & tamper-resistant hardware, easy Installation.
2. Waterproof rating IP66 dust proof.
3. Full keypad with memory, 3 button programmable telephone, support free dial.
4. Magnetic reed hook-switch.
5. Lightning protection to ITU-T recommendation K.21.
6. Heavy Duty handset with hearing Aid compatible(HAC) receiver, Noise canceling microphone.
7. Handset with industrial strong curly cord .
8. Metal keypad keep waterproof and dusty proof.
9. Temperature range from -40 degree to +70 degree.
10. Support echo cancellation.
11. Remote software upgrade, configuration and monitoring.
12. Optional 7 minute time-limited call.(This function upon buyer's requirement).
13. Powder coated in UV stabilized polyester finish.
14. Application: Tunnel, metro, railway, LRT, speedway, marine, ship, offshore, mine, power plant, bridge etc.



SPECIFICATION

VoIP SIP2.0 telephone	DTMF dialing	Audio Codes:G.711, G.723, G726,G.729
MTBF:100000hours	MTTR: 2 hours	Network:10/100 BaseTX Ethernet, RJ45
Hot-line (maximum length of each number is 16 digits)		connectors, Cat5e or better
Communication: Full duplex 2-way handset communication		IP Protocols:IPv4, TCP, UDP, RTP , DHCP, SIP
Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)		1 x LAN Protocols:Power over Ethernet(PoE,802.3af),
Power:Power over Ethernet, IEEE802.3af, Class 0		1 x WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)
Local power, 12VDC,Idle 2W, Max 10W		Programming:Non-volatile flash memory programming and configuration through Web GUI
Auxiliary Contacts: (option)		Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring.
1 Aux Output, dry contact		Echo cancellation code:G.167/G.168
Contact Ratings. Load: Resistive load		
Rated load:0.3 A at 125 VAC; 1 A at 30 VDC		
Rated carry current:1A		
Max.switching voltage:125 VAC,60VDC		
Max.switching current:1A		

Order information:

Model number	Power Supply	Item Number
KNSP-11-IP-Y_AD	DC12V 1A	SP0110052
KNSP-11-IP-Y_P	POE	SP0110022
KNSP-11-IP-Y_ADP	DC12V 1A +POE	SP0110092

*AD---Adapter UL (Input : AC110~240V , Output : DC12V 1A)

*P---POE


CERTIFICATION

RCM: AS/NZS CISPR 32 Australian communications:AS/CA S004
Australian Equipment-safety: AS/NZS 60950.1:2015
EMC: EN50121(Railway application-Electromagnetic Compatibility)



HONGKONG KOON TECHNOLOGY LTD
TEL:0086755 29790158/27448753 Fax:0086755 29790278
Email:marketing@koontech.com www.koontech.com

INSTALLATION

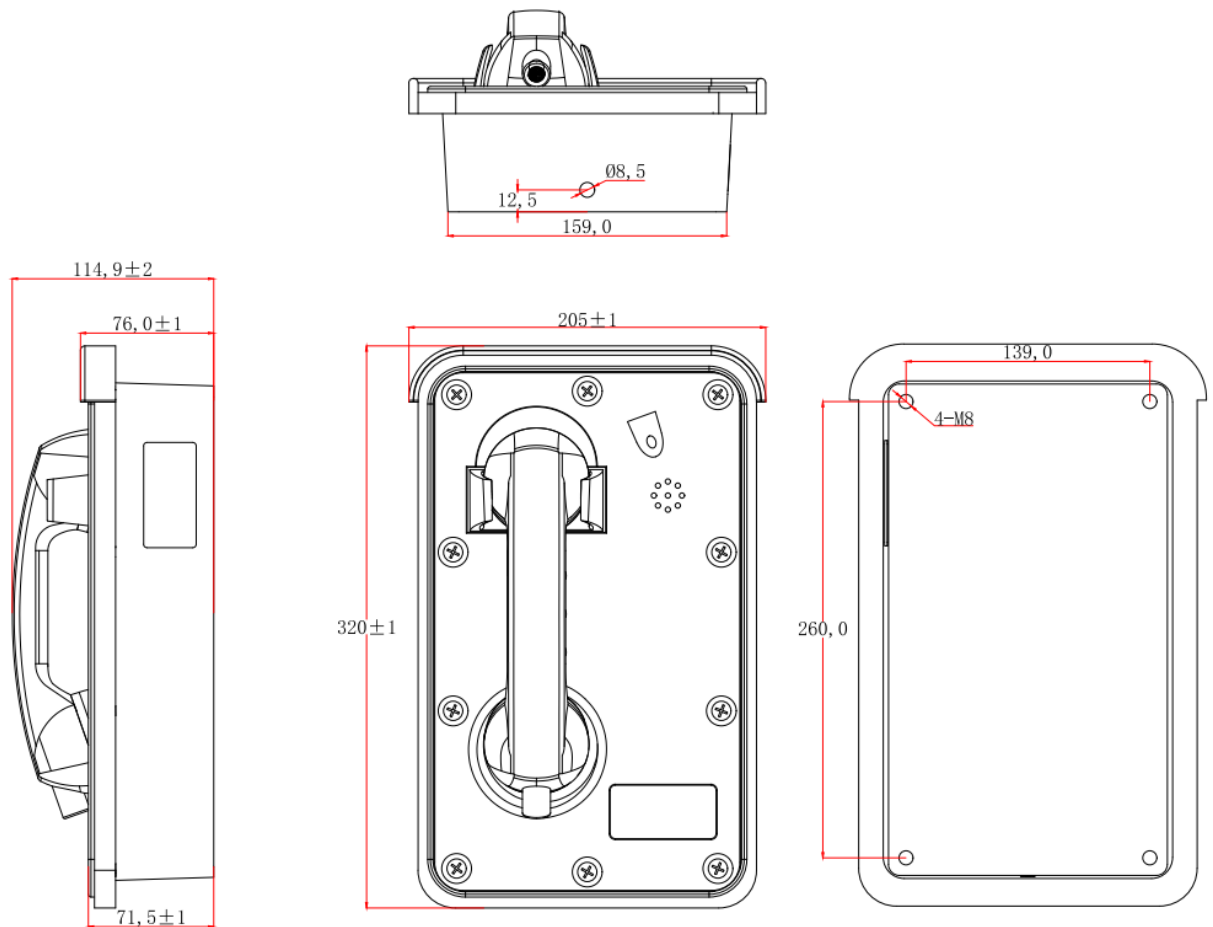

PACKING

Unit size: 320 * 205 * 120mm Unit: N.W: 3.4KG

1pcs packing box size: 439 * 277 * 191mm Unit N.W: 4.5KG

6pcs in 1 outer Carton box: size: 730*390*340mm N.W: 29KG



HONGKONG KOON TECHNOLOGY LTD

TEL: 0086755 29790158/27448753 Fax: 0086755 29790278
Email: marketing@koontech.com www.koontech.com