

VOIP-SIP IP Video INTERCOM ROBUST




Robust IP INTERCOM

- *Super good sound clarity during conversation
- *Support standard Session Initiation Protocol(SIP), RFC 3261
- *Remote software upgrade, configuration and monitoring
- *Power over Ethernet(PoE,802.3af), local 12V DC
- *IP66 vandal resistant marine grade stainless steel faceplate
- *LED indicator
- *Echo cancellation
- *Password, fingerprint, Video, Remote program

Model	KNZD-58	
Construction	Robust aluminium alloy die-cast body stainless steel face plate	
Dimensions(W*H*D)	Unit size: 235*131*78.7mm; Carton size each box:32.5*18*13.5cm/G.W.: 2.3kg	
Weight	2.3kg	
Operating Temperature	-40°F to +158°F/ -40°C to +70°C	
Relative Humidity	Up to 95% non-condensing	
Protection	IP66, vandal-resistant and water-resistant design	
Communication	Full duplex 2-way hands-free communication	
Call Control Signaling	SIP(RFC compliant), SIP Info(DTMF), RFC 2833(DTMF)	
Audio Codes	G.711, G.722, G.729	
Camera	Image Sensor	OV9712
	Total Pixels	480P 15fps
	Min. illumination	0.1lux
	Field of view	150° horizontal Opposite angles 170°
	Lens	2.75mm
	Framerate	15fps, 30fps, MJPEG, H.264
	Streamine	Dual-stream at different frame rate and bandwidth
	ONVIF compliant	Yes
Power	Power over Ethernet, IEEE802.3af, Class 0 Local power, 12VDC,Idle 2W, Max 10W	
Auxiliary Contacts	1 Aux Output, dry contact Contact Ratings Load: Resistive load Rated load:0.3 A at 125 VAC; 1 A at 30 VDC Rated carry current:1A Max.switching voltage:125 VAC,60VDC Max.switching current:1A	
Network	10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better	
IP Protocols	IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP	
LAN Protocols	Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)	
Programming	Non-volatile flash memory programming and configuration through Web GUI	
Management and Operation	DHCP and static IP, remote automatic software upgrade, centralized monitoring, status LED	
Echo cancellation code	G.167/G.168	

Size & Packing

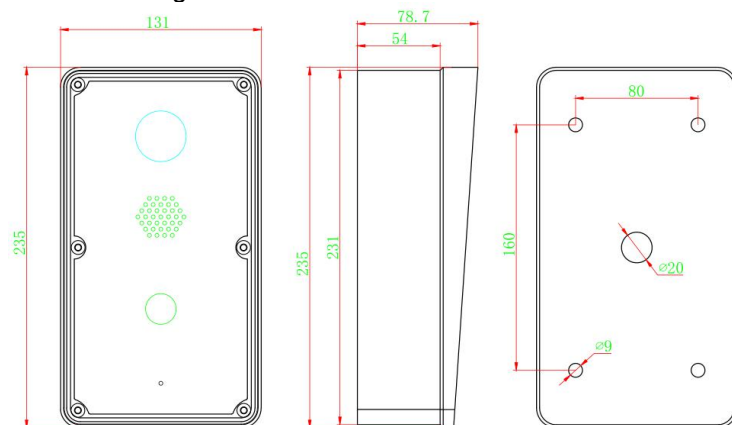

Kntech standard export carton packing
 Unit size: 235*131*78.7mm; N.W.: 2.3kg;
 1pc carton:32.5*18*13.5cm; N.W.: 2.3kg; G.W.: 2.6kg
 4pcs carton: 37*35*27cm; G.W.: 8.7kg