


Weatherproof Telephone Sounder and Lighting

Model: D13-DC12V



Housing	industrial standard coated steel body
Colour	Red box + blue beacon
Protection degree	IP 66 (IEC 529)
Operating position	Wall or ceiling mounting
Temperature range	Operation-20 to +70°C Storage-40 to +85°C
Weight	0.5 kg
Signalling device	The signalling device is actuated with a mains voltage of Adapter DC12V 1A
Power supply and Volume	Adapter DC 12V 1A Approx. 110 dB(A) at 1m distance
Beacon	Beacon flashing when telephone ringing
Mounting:	Wall mounting

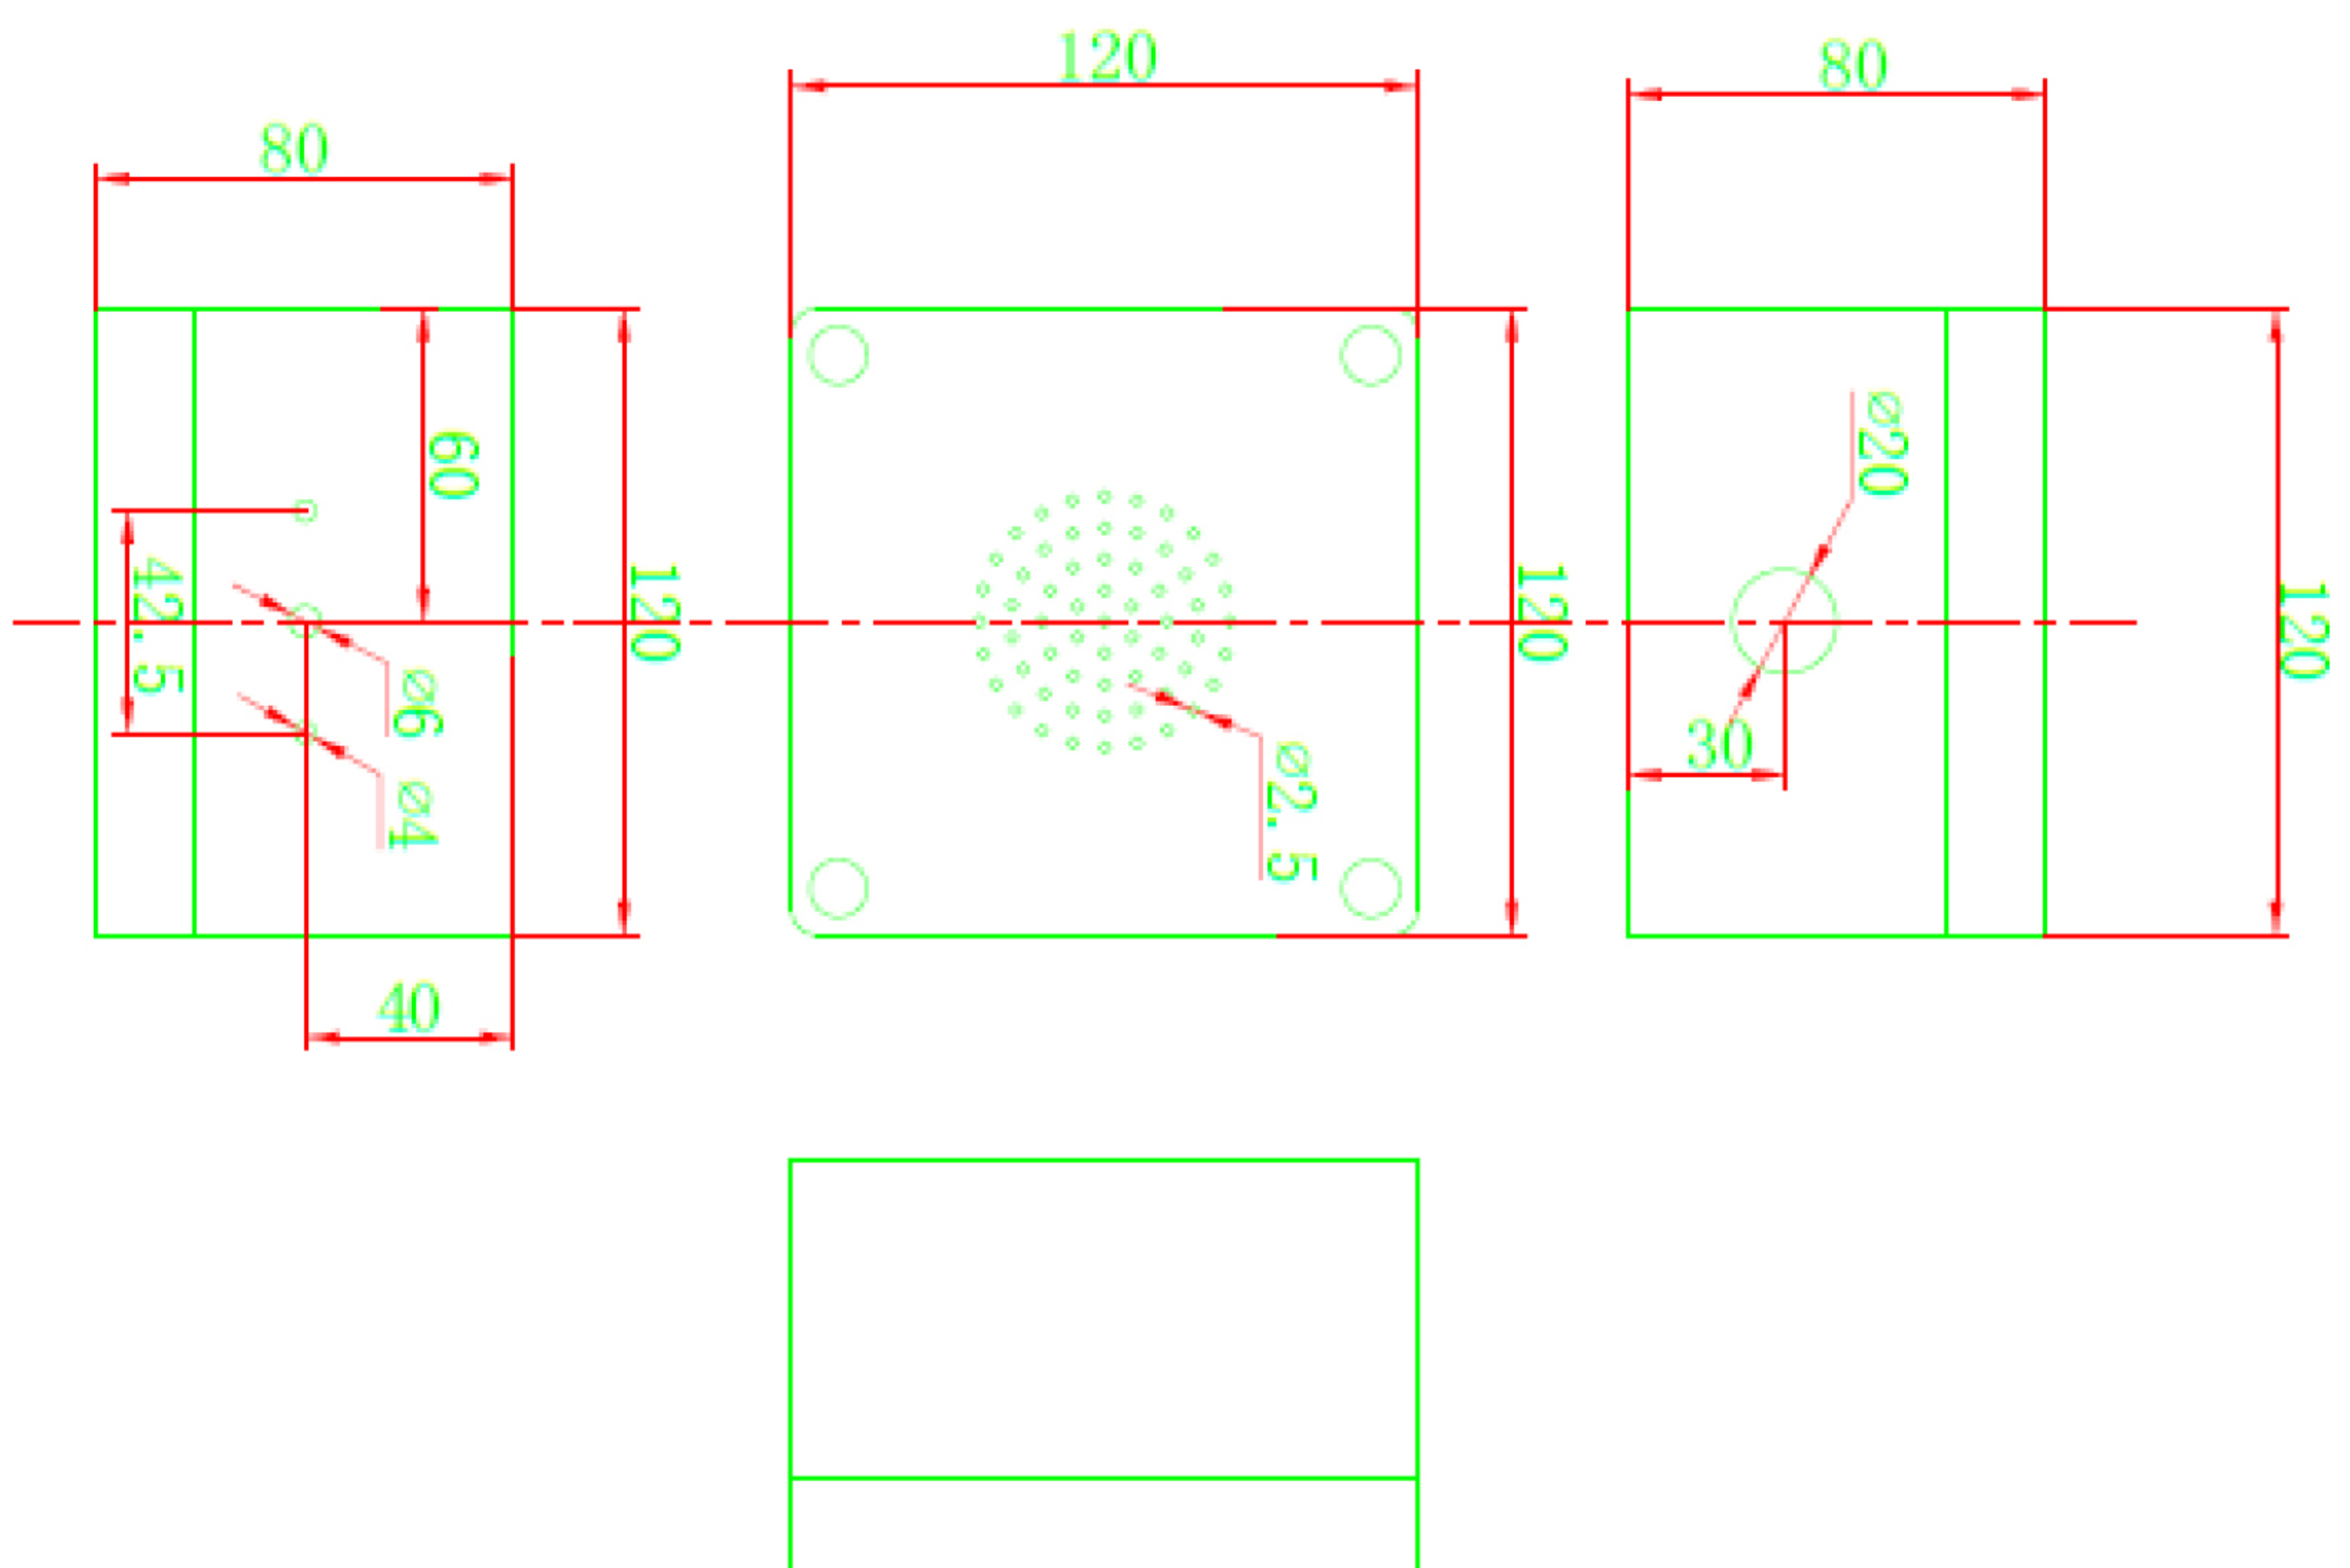



Shenzhen Tian Hai Test Technology Co.,Ltd.

Test report	
EN 60529:2001 IDT	
Degrees of protection provided by enclosures (IP Code)	
Report	--
Report reference No.	TH16DR-176S
Tested by (+signature)	Robert
Reviewed by (+signature)	Prince
Date of issue	Apr 10, 2016
	
Testing laboratory	--
Name	Shenzhen Tian Hai Test Technology Co.,Ltd.
Address	FL.1, No.2 BLDG,Yalian Industrial Zone, Wuhe Road, Bantian street, Longgang District, Shenzhen, China
Test location	Same as above
Client Name	Hongkong Koon Technology Limited
Address	6th/F, 268# building, Nanchang industrial park, Gushu, Baoan, Shenzhen, China
Model no.	D1,D2,D3,D4,D5,D6,D7,D8,D9,D10,D11,12,D13,D14,D15,D16,D17, D18
Description	Koophone Alarm Sunderntech Weatherproof Tele
Rating(s)	AC110-240 powered or DC 12V 24 VDC to 63 VDC
Manufacturer	Hongkong Koon Technology Limited
Address	6th/F, 268# building, Nanchang industrial park, Gushu, Baoan, Shenzhen, China
Test specification	
Standard	EN 60529:2001 IDT
Operating conditions	continuous operation
Level of protection	IP65
Equipment rating	---
Trade mark	GELID Solutions
Note	N/A

Test case verdicts	
Test case does not apply to the test object	N (Not apply)
Test item does meet the requirement	P(Pass)
Test item does not meet the requirement	F(Fail)