



KNTD-100

UC features for up to 100 users

The KNTD-100 IP PBX appliance is designed to bring leading edge voice, video, data, and ability features to enterprises, small and medium businesses, retail and residential environments in an easy-to-manage fashion. This enterprise-grade on premise IP PBX supports E1, SIP Trunk, RJ45 networks and offers scalability by supporting up to 100 users. This secure and reliable IP PBX delivers unified communication features at an unprecedented price point without any licensing fees, costs-per-feature, or recurring fees. Host Standby N+1 redundancy System design.

KNTD-100 server is a computer device that centrally processes and manages information, with multiple functions such as storing, processing, sharing, and protecting data.

The KNTD-100 server can be equipped with three major systems: telephone, broadcasting, and access control, and has efficient and stable performance to meet your various needs.



100 users
Supports up to 100 users,
20 SIP trunk accounts,
up to 10 concurrent calls.



Three-In-One
Optional,
Telephone system,
Broadcasting system,
Access control system.



Strongest-possible
security protection using
HTTP.



4th Generation
Intel® Core™ i3 Processors



Supports IVR
(Interactive Voice Response).



Built-in call recording server
recordings accessed
via webuser interface.

SIP

Supports call queue
for efficient call
volume management.



Linux System



Technical Parameter




Model	KNTD-100 IP PBX Enterprise - class unified communication system
Hardware interface	
	Host Standby N+1 redundancy System design
Network Interface	RJ45 Gigabit interface (10/100 / 1000M Ethernet adaptive)
Reset switch	Support, Web configuration
Audio / video capability	
Speech algorithm	G.711, 7.29, 7.23, 7.26 encoding
Voice	G.711 A-law / U-law, G.723.1, G.726, G.729A
Video coding	H.264.
Signaling protocol	
DTMF detection method	Support RFC2833, SIP INFO
Digital signal	SIP2.0
Terminal management and automatic deployment capabilities	Support for SIP terminal plug -and-play auto-deployment (including DHCP / multicast SIP , support Remote upgrade, local upgrade)
Network protocol	TCP UDP IP, RTP DHCP, SSH, HTTP, SIP
Safety	
Advanced defense	Alert events, whitelists, blacklists
Physical characteristics	
Global universal power supply	Input: 100~ ~ 240VAC, 50 / 60Hz;
weight	Equipment weight: 3.5 Kg; Package weight: 4.4Kg
Use the environment	Operating environment: 32 ~ 113° F / 0 ~ 45° C, humidity 10 - 90% (No condensation) Storage environment: 14-140°F / - 10 ~ ~ 60° C, humidity 10 - 90% (No condensation)
Size	430mm(L)X246.7mm(W)X 44.3mm(H)IU standard
Installation	Desktop or cabinet installation

Additional features






Multi language support	Web user interface supports English / Simplified Chinese, customizable IVR / voice prompts in English, Chinese
Caller ID	ETSI-DTMF
Call Center	Supports call queues.
Customize Auto	Supports IVR (Interactive Voice Response)
Concurrent call	Up to 100 SIP terminals can be registered, up to 20 concurrent calls
Members	Calls waiting, Call transfer, Ringing group, Subgroup, meeting, broadcast, blacklist, call / intercom, etc

KNTECH IP PABX MODEL NUMBER

REGISTER USER	SIMULTANEOUS CALLS	MODEL NUMBER
50 line	10 line	KNTD-50
100 line	20 line	KNTD-100
200 line	40 line	KNTD-200
300 line	60 line	KNTD-300
500 line	100 line	KNTD-500
800 line	160 line	KNTD-800
1000 line	200 line	KNTD-01K
3000 line	600 line	KNTD-03K
5000 line	1000 line	KNTD-05K

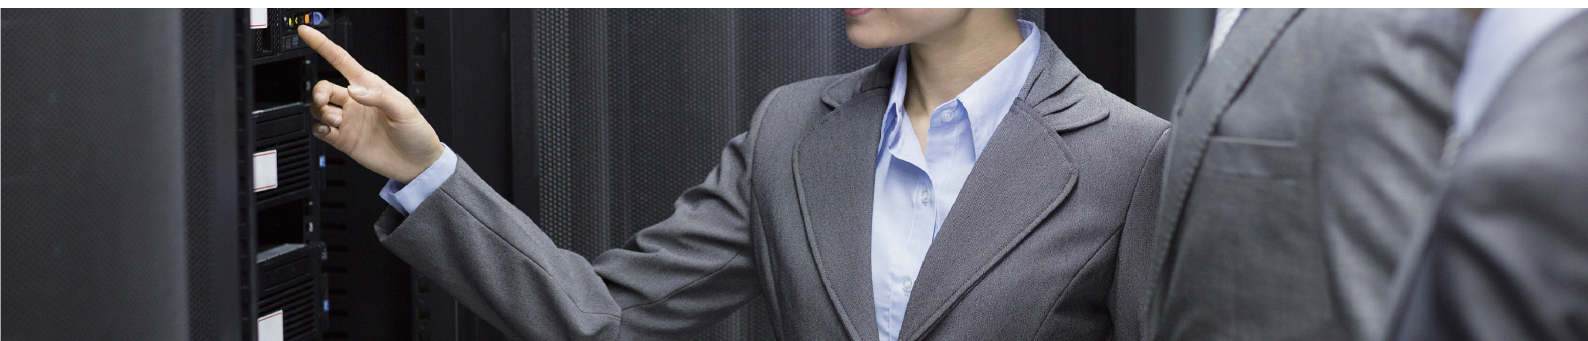

Voice dispatch-Telephone call

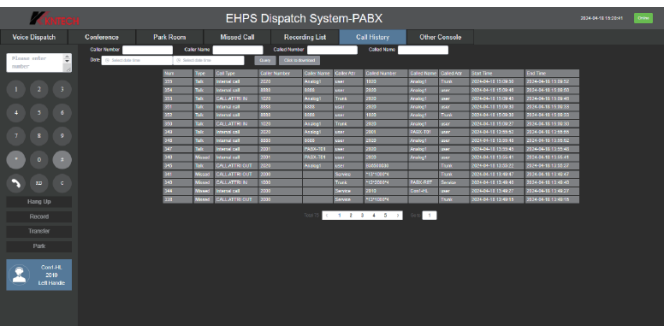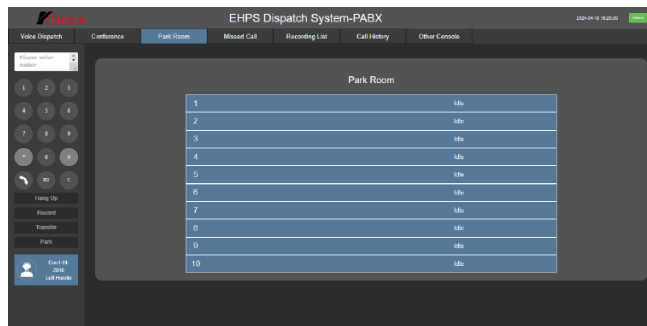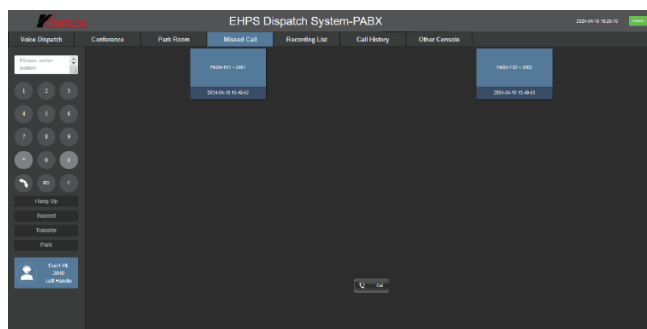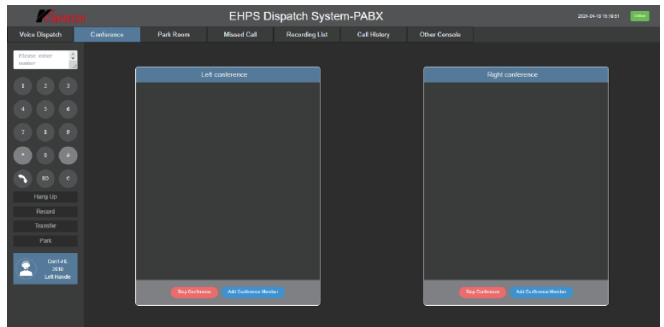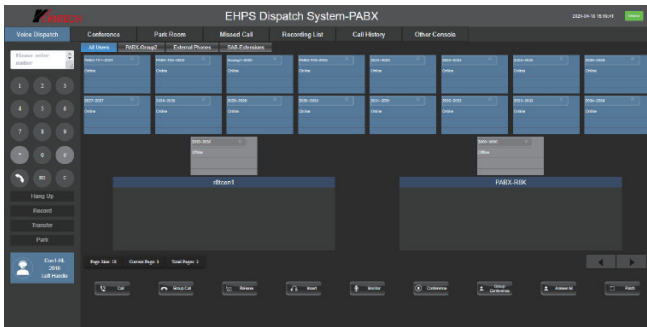

KNTech

EHPS Dispatch System-PABX

2024-04-18 15:20:30

Online

Voice Dispatch

Conference

Park Room

Missed Call

Recording List

Call History

Other Console

Please enter number

1

2

3

4

5

6

7

8

9

*

0

#

RD

C

Hang Up

Record

Transfer

Park

Conf-HL

2010

Left Handle

← 2020 Analog1

Query

Peer Number	Date	Size	Operation
1004-20270719-12-01-30.wav	2027-07-19 12:01:38	4440044	download Delete ▶ 0:00 / 4:37
1004-20270719-11-55-23.wav	2027-07-19 11:55:23	4877164	download Delete ▶ 0:00 / 5:04
1004-20270719-11-54-57.wav	2027-07-19 11:54:57	275884	download Delete ▶ 0:00 / 0:17
38500030-20270719-11-46-02.wav	2027-07-19 11:46:02	142124	download Delete ▶ 0:00 / 0:00
38500030-20240418-13-55-30.wav	2024-04-18 13:55:30	108524	download Delete ▶ 0:00 / 0:00
2001-20240417-17-01-26.wav	2024-04-17 17:01:26	11244	download Delete ▶ 0:00 / 0:00
1000-20240417-15-46-33.wav	2024-04-17 15:46:33	140844	download Delete ▶ 0:00 / 0:00
1000-20240417-15-46-28.wav	2024-04-17 15:46:28	7084	download Delete ▶ 0:00 / 0:00
38500020-20240417-09-30-10.wav	2024-04-17 09:30:10	338794924	download Delete ▶ 0:00 / 0:00
38500030-20240418-14-09-38.wav	2024-04-18 14:09:38	257324	download Delete ▶ 0:00 / 0:00
1002-20240412-11-20-05.wav	2024-04-12 11:20:05	4844	download Delete ▶ 0:00 / 0:00
38500030-20240412-11-17-07.wav	2024-04-12 11:17:07	154924	download Delete ▶ 0:00 / 0:00