



Bi-directional Projection Speaker

Model Number: KNL29-10W



Key Features

- Bi-directional Sound Transmission: Optimized for long-distance sound projection,minimizes crosstalk to ensure minimal disruption for inhabitants.
- 360°Adjustable Angle:With a U-shaped portable bracket,the angle can be adjusted up to 360 degree.
- Versatile Installation for Tunnels:Designed for optimal installation and use in pedestrian corridors and various tunnels.

Specification

Model	KNL29-10W
Rated Voltage	100V
Dimension	Φ138*200mm
Material	ABS & Aluminum Mesh Cover
Audio Port	2 Pin Terminal Audio Input
Frequency response	180Hz-16KHz
Sensitivity	86±3dB
Rated power	10W
Power available	2.5W: Connect Blue&Green cables
	5W: Connect Blue&Yellow cables
	10W: Connect Blue&Red cables
Color	White
Net Weight	2.8KG




Bi-directional Sound Transmission

Optimized for long-distance sound projection
minimizes crosstalk to ensure minimal
disruption for inhabitants.




360° Adjustable Angle

With a U-shaped portable bracket, the angle can
be adjusted up to 360 degrees.

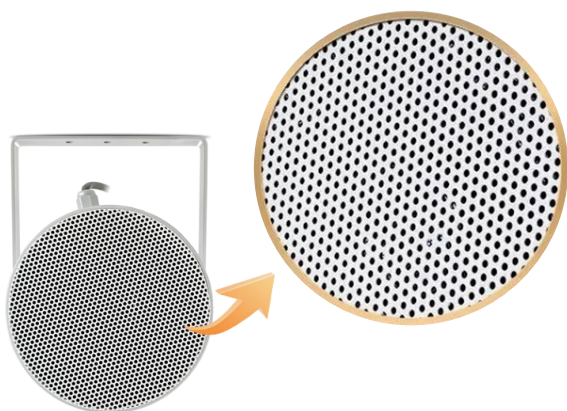

Aluminum Mesh Cover

Minimalist design-perfectly integrated into all
interior spaces

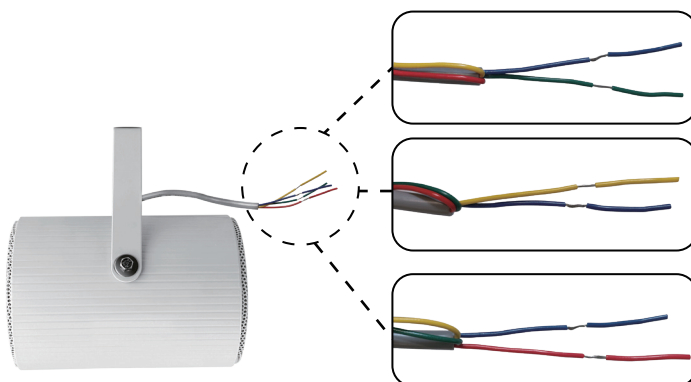

Power available


2.5W: Connect Blue&Green cables

5W: Connect Blue&Yellow cables

10W: Connect Blue&Red cables

System Network Diagram


Public Address System

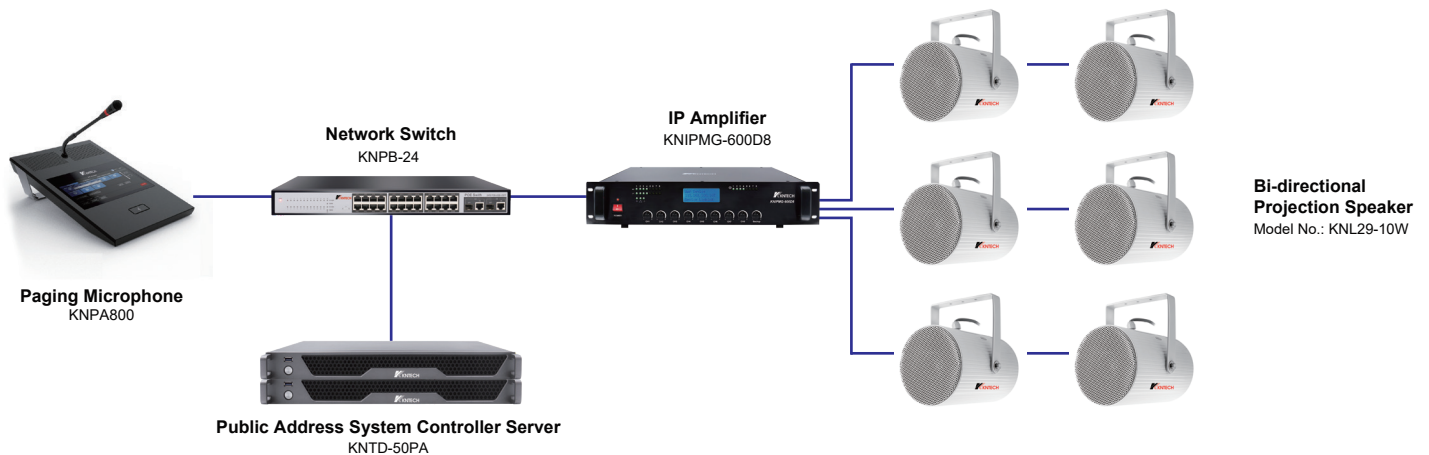

Picture

Size Display

Unit: mm

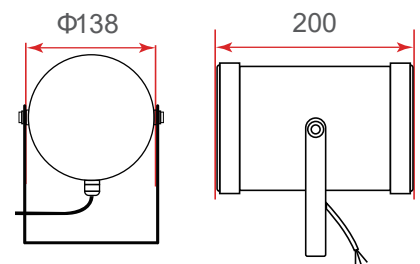

Web: www.koontech.com

Email: marketing@koontech.com

Tel: (HK Office) +852 9068 2799 / (Shenzhen Office) +86 755 2744 8753

Shenzhen Office: 1001 Block A Building T3, Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTech Building, Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China