





15W speaker Model: L-P-15W10W

Rated Input	15 W-10W
Rated Impedance	70 V line: 327 Ω (15 W), 1.67 k Ω (10 W), 100V line: 666 Ω (15 W) 100V line: 1000 Ω (10 W)
Sensitivity	100dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise)
Frequency Response	110 Hz - 15 kHz
Speaker Component	(6.5")
Applicable Cable	Solid copper wire: ϕ 0.8 - ϕ 2.0 mm (AWG 20 - 12) 2 Stranded copper wire: 0.5 - 2.0 mm (AWG 20 - 14)
Connection	Push-in connector (bridging terminal)
Operating Temperature	-10 $^{\circ}$ C to +50 $^{\circ}$ C (14 $^{\circ}$ F to 122 $^{\circ}$ F)
Finish	Cabinet: ABS (Acrylonitrile Butadiene Styrene) , white Grille: Surface-treated steel plate mesh, white
Dimensions	260 (W) $\times$ 183 (H) $\times$ 130 (D) mm
Weight	2.6 kg (5.73 lb)
Accessory	Rubber grommet ...2, Speaker mounting screw (4 $\times$ 16) ...4,



Metal grille, reliable quality

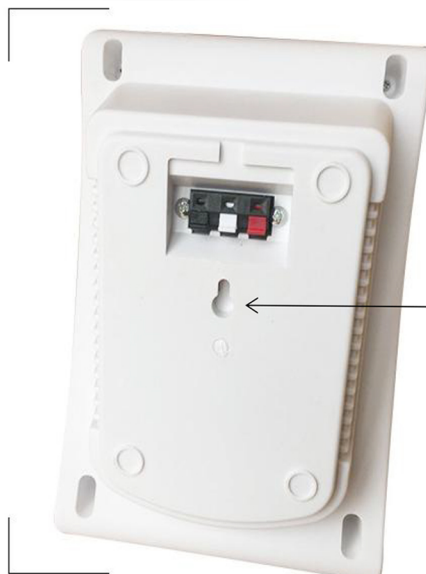

← WALL MOUNTING