


Weatherproof Telephone Sounder and Lighting

Model: D13-DC12V

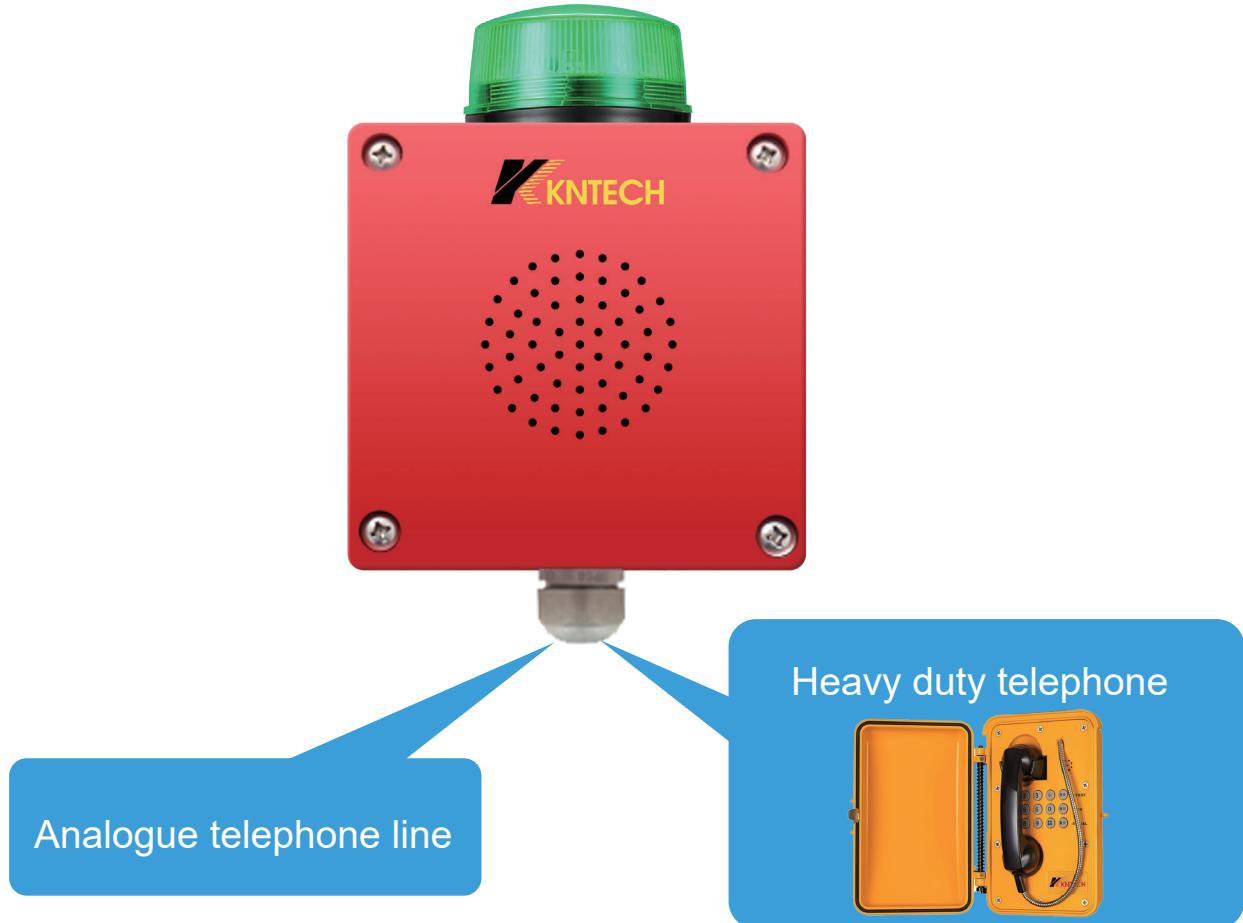

Housing	Industrial standard coated steel body
Colour	Red, Blue, Green, Amber
Protection degree	IP66 (IEC 529)
Operating position	Wall mounting
Temperature range	Operation - 20 to + 70°C Storage - 40 to + 75°C
Weight	0.8 kg
Signaling device	The signaling device is actuated with a mains voltage of 110 to 230 VAC
Power supply	AC110-240 powered or DC 12V
Volume	Approx. 110 dB(A) at over 1m distance
Beacon	Beacon flashing when telephone ringing
Call voltage	40 VAC to 90 VAC
Exchange voltage	24 VDC to 63 VDC

■ Available Colors



D13-DC12V-Blue



D13-DC12V-Red



D13-DC12V-Green




D13-DC12V-Amber

■ General View




■ Dimensions

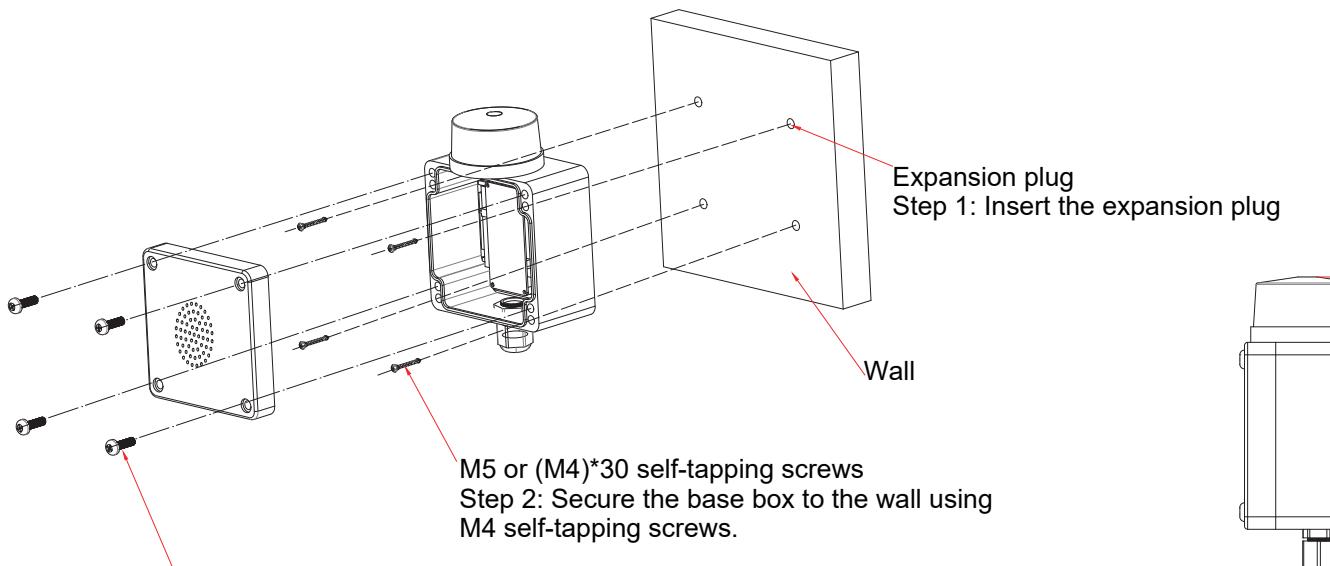

The top cover comes with its own screws.

Step 3: Use the screws provided with the top cover to securely fasten the top cover to the bottom case.

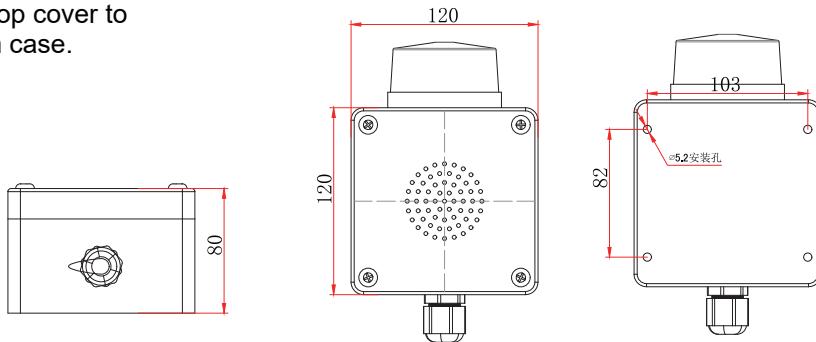

Web: www.koontech.com

Email: marketing@koontech.com

Tel: (Shenzhen Office) +86 755 2744 8753 / (HK Office) +852 3460 4652

Shenzhen Office: 1001 Block A Building T3, Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTECH Building, Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China