



**KNTD-100**

## UC features for up to 100 users

The KNTD-100 IP PBX appliance is designed to bring leading edge voice, video, data, and ability features to enterprises, small and medium businesses, retail and residential environments in an easy-to-manage fashion. This enterprise-grade on premise IP PBX supports E1, SIP Trunk, RJ45 networks and offers scalability by supporting up to 100 users. This secure and reliable IP PBX delivers unified communication features at an unprecedented price point it houts any licensing fees, costs-per-feature, or recurring fees. Host Standby N+1 redundancy System design.

KNTD-100 server is a computer device that centrally processes and manages information, with multiple functions such as storing, processing, sharing, and protecting data.

The KNTD-100 server can be equipped with three major systems: telephone, broadcasting, and access control, and has efficient and stable performance to meet your various needs.



**100 users**  
Supports up to 100 users,  
20 SIP trunkacCounts,  
up to 10 concurrent calls.



**Three-In-One**  
Optional,  
Telephone system,  
Broadcasting system,  
Access control system.



**Strongest-possible**  
security protectionusing  
HTTP.



**4th Generation**  
Intel® Core™ i3 Processors



**Supports IVR**  
(Interactive VoiceResponse).



**Built-in call recordingserver**  
recordingsaccessed  
via webuser interface.

**SIP**

**Supports call queue**  
for efficient call  
volume management.



**Linux System**



## Technical Parameter



Model	KNTD-100 IP PBX Enterprise - class unified communication system
<b>Hardware interface</b>	
	Host Standby N+1 redundancy System design
Network Interface	RJ45 Gigabit interface (10/100 / 1000M Ethernet adaptive)
Reset switch	Support, Web configuration
<b>Audio / video capability</b>	
Speech algorithm	G.711, 7.29, 7.23,7.26 encoding
Voice	G.711 A-law/ U-law, G.723.1, G.726, G.729A
Video coding	H.264.
<b>Signaling protocol</b>	
DTMF detection method	Support RFC2833, SIP INFO
Digital signal	SIP2.0
Terminal management and automatic deployment capabilities	Support for SIP terminal plug -and-play auto-deployment (including DHCP / multicast SIP , support Remote upgrade,local upgrade)
Network protocol	TCP   UDP   IP, RTP DHCP,SSH,HTTP,SIP
<b>Safety</b>	
Advanced defense	Alert events, whitelists, blacklists
<b>Physical characteristics</b>	
Global universal power supply	Input: 100~ ~ 240VAC, 50 / 60Hz;
weight	Equipment weight: 3.5 Kg; Package weight: 4,4Kg
Use the environment	Operating environment:32 -113° F/0~ 45° C, humidity 10 - 90% (No condensation) Storage environment: 14-140°F   / - 10 ~ 60° C, humidity 10 - 90% (No condensation)
Size	428*259.4*44.6mm
Installation	Desktop or cabinet installation

### Additional features



Multi language support	Web user interface supports English / Simplified Chinese, customizable IVR / voice prompts in English, Chinese
Caller ID	ETSI-DTMF
Call Center	Supports call queues.
Customize Auto	Supports IVR (Interactive Voice Response)
Concurrent call	Up to 100 SIP terminals can be registered, up to 20 concurrent calls
Members	Calls waiting, Call transfer, Ringing group, Subgroup, meeting, broadcast, blacklist, call / intercom, etc

### KNTECH IP PABX MODEL NUMBER

REGISTER USER	SIMULTANEOUS CALLS	MODEL NUMBER
50 line	50 line	KNTD-50
100 line	50 line	KNTD-100
200 line	40 line	KNTD-200
300 line	60 line	KNTD-300
500 line	100 line	KNTD-500
800 line	160 line	KNTD-800
1000 line	200 line	KNTD-01K
3000 line	600 line	KNTD-03K
5000 line	1000 line	KNTD-05K



## Voice dispatch-Telephone call

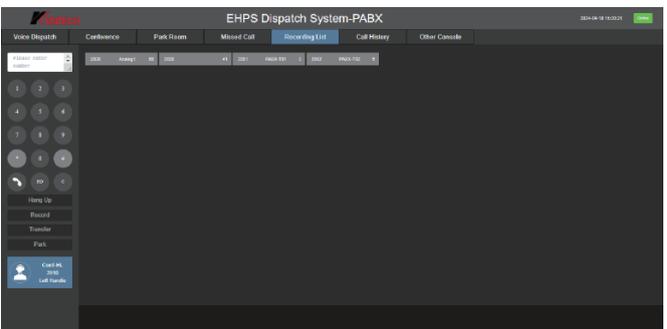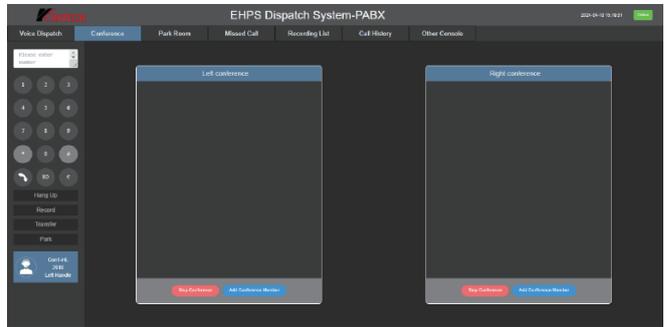

### EHPS Dispatch System-PABX

2024-04-18 15:20:30 Online

Voice Dispatch

Conference

Park Room

Missed Call

Recording List

Call History

Other Console

← 2020 Analog1 Query

Peer Number	Date	Size	Operation
1004-20270719-12-01-30.wav	2027-07-19 12:01:30	4440044	download Delete ▶ 0:00 / 4:37
1004-20270719-11-55-23.wav	2027-07-19 11:55:23	4877164	download Delete ▶ 0:00 / 5:04
1004-20270719-11-54-57.wav	2027-07-19 11:54:57	275884	download Delete ▶ 0:00 / 0:17
38500030-20270719-11-46-02.wav	2027-07-19 11:46:02	142124	download Delete ▶ 0:00 / 0:00
38500030-20240418-13-55-30.wav	2024-04-18 13:55:30	108524	download Delete ▶ 0:00 / 0:00
2001-20240417-17-01-26.wav	2024-04-17 17:01:26	11244	download Delete ▶ 0:00 / 0:00
1000-20240417-15-46-33.wav	2024-04-17 15:46:33	140844	download Delete ▶ 0:00 / 0:00
1000-20240417-15-46-28.wav	2024-04-17 15:46:28	7084	download Delete ▶ 0:00 / 0:00
38500020-20240417-09-30-10.wav	2024-04-17 09:30:10	338794924	download Delete ▶ 0:00 / 0:00
38500030-20240410-14-09-38.wav	2024-04-10 14:09:38	257324	download Delete ▶ 0:00 / 0:00
1002-20240412-11-20-05.wav	2024-04-12 11:20:05	4544	download Delete ▶ 0:00 / 0:00
38500030-20240412-11-17-07.wav	2024-04-12 11:17:07	154924	download Delete ▶ 0:00 / 0:00

Peer Number: 1004-20270719-12-01-30.wav

Date: 2027-07-19 12:01:30

Size: 4440044

Operation: download Delete ▶ 0:00 / 4:37