

DESIGNED FOR MISSION-CRITICAL TELECOMMUNICATION INFRASTRUCTURE

Model: KNRAP2



Designed for Mission-Critical Telecommunication Infrastructure

Overview

The KNTech KNRAP2 is a robust, industrial-grade remote alarm indicator panel designed specifically for government and enterprise PABX systems. Compliant with HK and international standards, it provides immediate visual and audible alerts for critical system failures (Major/Minor Alarms), ensuring rapid response and high system availability.

Built with a premium SUS304 stainless steel faceplate and vandal-resistant components, the KNRAP2 is engineered for durability in 24/7 operational environments such as Building Management Offices (BMO), Security Control Rooms, and Data Centers.

Key Features

- ✓ Rugged Design: High-quality Brushed Stainless Steel (SUS304) faceplate, resistant to corrosion and wear.
- ✓ Standard Compliance: easy wall-mount installation.
- ✓ Dual Alert System: Equipped with high-brightness LEDs (Green/Red) and a powerful Piezo Buzzer (>75dB).
- ✓ Intelligent Logic: Integrated MCU/Relay logic supports "Alarm Mute" function – silencing the buzzer while keeping the Red LED lit until the fault is cleared.
- ✓ User Controls: Vandal-resistant metal buttons for Audio Mute.

Technical Specifications

Feature	Specification
Model	KNTECH KNRAP2
Dimensions	150mm (H) x 130mm (W) x 40mm (D)
Material	SUS304 Brushed Stainless Steel Faceplate (1.2mm thick)

Input Power	12V - DC / POE (Optional)
Visual Indicators	Normal: High-intensity Green LED (Metal Housing) Alarm: High-intensity Red LED (Metal Housing)
Audible Alarm	Internal Piezo Buzzer, Sound Level > 75-90dB @ 1 meter
Control Buttons	MUTE: Momentary Metal Push Button (Silence buzzer only)
Logic Operation	Auto-latching Mute circuit; Auto-reset when alarm clears
Connectivity	Standard Cat5e/Cat6 distance up to 1000 meters
Mounting	Flush or Surface Mount
Operating Temp	-10°C to +60°C
Relative Humidity	10% - 95% (Non-condensing)


Operation Logic

1. Normal State: LED Green and Steady, Buzzer OFF.
2. Alarm State: When PABX sends a fault signal
 - LED turn to red and Flashing/Steady.
 - Buzzer sounds intermittently.
3. Mute Action: Operator presses the MUTE button:
 - Buzzer turns OFF (Acknowledged).
 - Red LED remains ON (visual reminder) until the PABX fault is resolved.
4. Recovery: When fault clears, system auto-resets to Normal State LED turn to Green.

Visual Indicator Logic Table

System Status	LED Color	LED Pattern	Buzzer Status	Meaning
Normal	Green	Steady ON	OFF	System Healthy
Minor Fault	Red	Steady ON	ON (Mutable)	Non-critical / Warning
Major Fault	Red	Flashing	ON (Mutable)	Critical Failure / Urgent

INSTALLATION

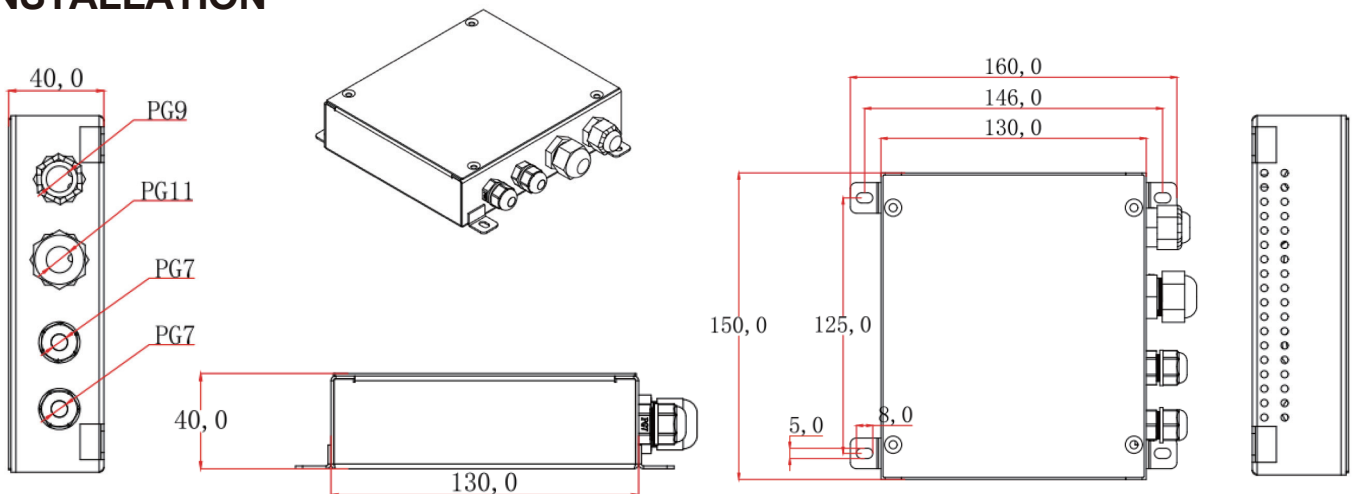

Web: www.koontech.com

Email: marketing@koontech.com

Tel: (HK Office) +852 9068 2799 / (Shenzhen Office) +86 755 2744 8753

Shenzhen Office: 1001 Block A Building T3, Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTECH Building, Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China