


Line end detector

KNPA-LD01



The end-of-line detector is a device used to monitor the integrity of a loudspeaker circuit. It is attached to the end of the loudspeaker circuit after the last speaker in a series of cascaded connections, can communicate with the drive power amplifier channel to ensure line integrity.


Wiring diagram

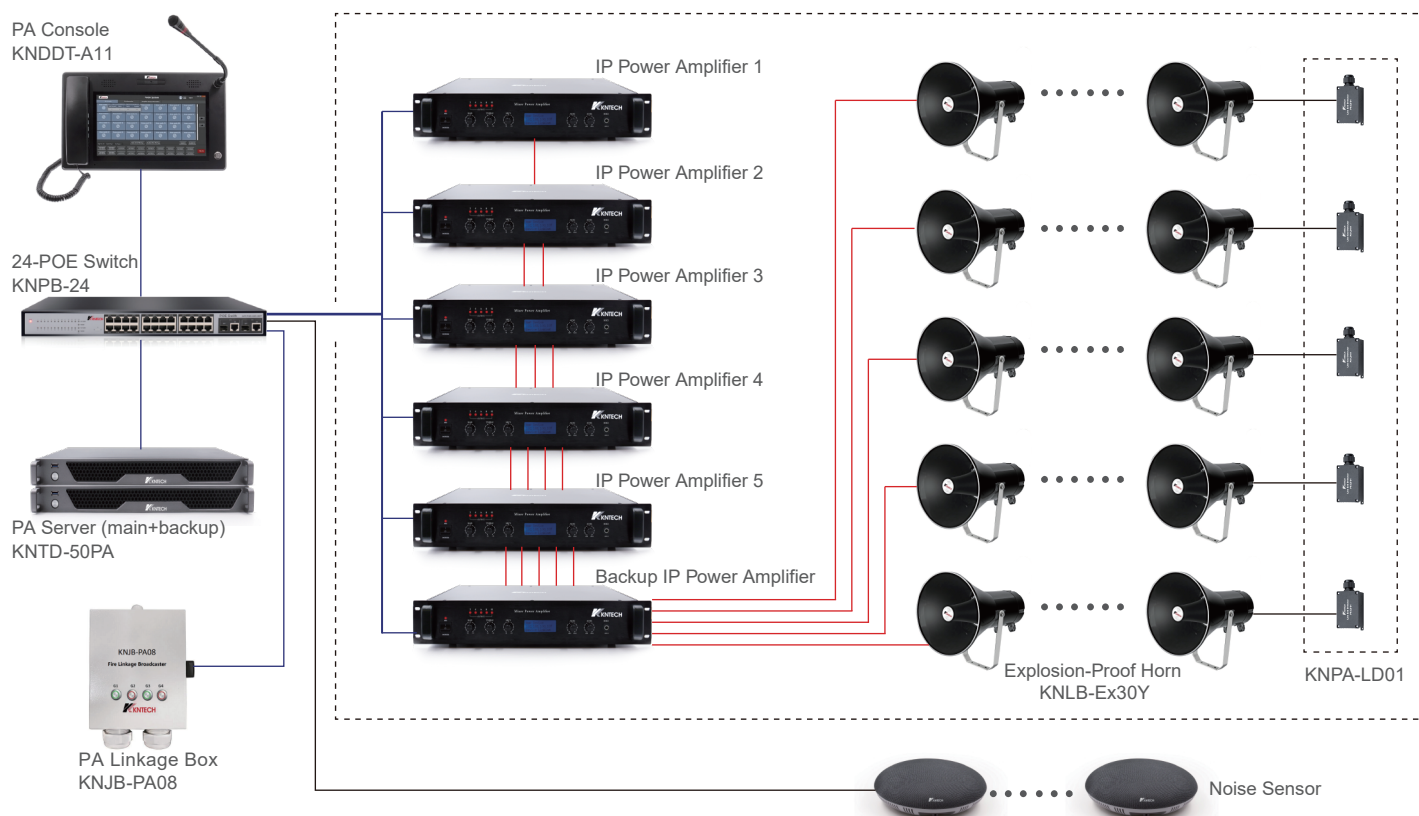

Features

- Connect the loudspeakers in cascaded mode to monitor the loudspeaker circuit reliably
- Compact device for loudspeaker end-of-line supervision
- Fault detection in amplifier without additional wiring
- Flexible mounting options

Specification

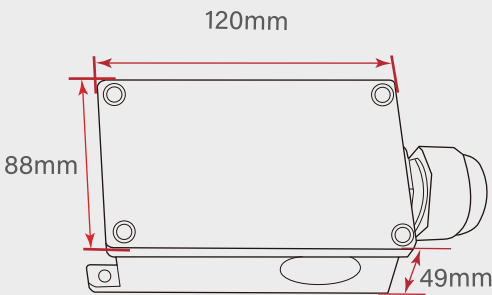Frequency	22KHz
Distortion	≤ 1%
Input voltage	Max 120V
Connector type	M20 Gland
IP rating	IP65
Temperature	-25°C to 55°C
Humidity	5 - 100 %
Dimensions	120mm x 88mm x 49mm 

Web: www.koontech.com

Email: marketing@koontech.com

Tel: (HK Office) +852 9068 2799 / (Shenzhen Office) +86 755 2744 8753

Shenzhen Office: 1001 Block A Building T3,Yifang Center, Bao'an, Shenzhen, Guangdong, China

HK Office: Unit C, 2/F, Ka To Factory Building, 2 Cheung Yue Street, Cheung Sha Wan, Kowloon, Hong Kong

Factory: KNTech Building, Phoenix Mountain, Limhai Zone, Shajiao Community, Humen, Dongguan, China