Analogue KNSP-03+D23 Waterproof Telephone




DESCRIPTION

1. Robust aluminium alloy die-cast body, Vandal & tamper-resistant hardware, easy Installation.
2. Waterproof rating IP66 dust proof.
3. Without keypad, hotline setting.
4. Door cover: orient automatically and good self - closing, convenient for use.
5. Weather resistant to IP66 standard, service temperature range from -30 degree to +75 degree.
6. Magnetic reed hook-switch.
7. Lightening protection to ITU-T recommendation K.21.
8. With line powered indication lamp. red, blue, yellow color optional
9. Handset with industrial m e t a l cord .
10. Silicon keypad keep waterproof and dusty proof.
11. Phone integrity wiring to enable the telephone system to check if the telephone unit is still Operational. (if PABX have this available we can provide this function).
12. Optional 7 minute time out to release the line if the handset is left off hook. This function upon buyer's requirement).
13. Powder coated in UV stabilized polyester finish.
14. The housing covered with a layer of reflective label for easy identification at night.Optional
15. Application: Tunnel, metro, railway, LRT, speedway, marine, ship,offshore, mine, power plant,bridge etc.

SPECIFICATION

1. **PSTN analogue telephone.**
2. **DTMF dialing.**
3. **MTBF:** 100000 hours.
4. **MTTR:** 2 hours.
5. **Connection:** RJ11 screw terminal pair cable.
6. **Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.**
7. **Ambient temperature:** -30 ~ +60 degree. **Relative humidity:** 10%~95%.
   Atmospheric pressure: 86~106Kpa. **Circumstance noise:** less than 60dB(A).
8. **Sound level of ringing:** over 70dB(A).
9. **Standard frequency:**
   low frequency group: 697. 770. 852. 941Hz,
   high frequency group: 1209. 1336. 1477Hz,
   frequency deviation: -1.5% ~ +1.5%.
10. **Call transmission index:** (5KM)SLR<12,RLR<-1,STMR>10, output impedance is 600 Ohm.
    maximum distance: 7KM.
11. **Connection:** RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request).
    with stainless steel cable protected.

INSTALLATION

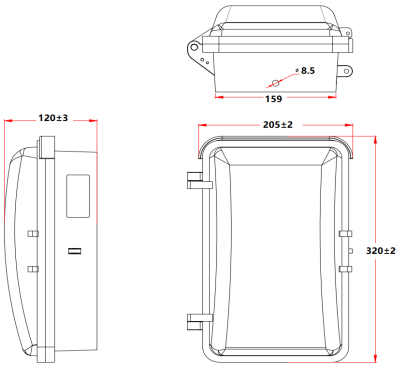







CERTIFICATION

EN55022: emissions **EN55024: immunity**
Ingress Protection: GB4208-93 IP66 FCC **ITU-T Recommendations K21**
EMC: EN50121(Railway application-Electromagnetic Compatibility)

CE FC IP66 RoHS

PACKAGING

Unit size:320 *205*120mm **Unit: N.W:5.3KG**
1pcs packing box size: 439 *277 *191mm **Unit N.W:5.3KG** **Unit G.W:7KG**
6pcs in 1 outer Carton box size: 730*390*340mm **N.W:31.8KG** **G.W:34KG**