



## HONGKONG KOON TECHNOLOGY LIMITED

268#, Nangchang industrial park, Gushu, Baoan district,  
Shenzhen, China

Tel: +86 755 27448753 ext 8015 Fax: +86755 29790278

www.koontech.com

Email: jenny@koontech.com sales1@koontech.com

www.hksosphone.com



# ACOUSTIC HOOD

**Model: RF-13**

### Main features:

- Designed for use in noisy areas and harsh environments
- Extremely robust
- Good acoustic qualities and highly visible
- High visibility yellow paint finish
- 23dB noise reduction
- Telephone mounting panel 200mm deep shelf
- Popular in noisy factories such as newspaper print rooms.

### Noise Reduction:

For external or internal use, the RF-13 is designed to attain a high level of noise reduction up to

**23dB**. Manufactured using

general-purpose resin material to **BS476** Class 1 fire regulation, the RF-13 is extremely robust and weatherproof. Inside the hood's outer shell is a perforated polypropylene lining that houses 50mm non-hygroscopic acoustic insulation.

Fitted to the inner back wall is a stainless steel apparatus plate; beneath this plate





## HONGKONG KOON TECHNOLOGY LIMITED

268#, Nangchang industrial park, Gushu, Baoan district,  
Shenzhen, China

Tel: +86 755 27448753 ext 8015 Fax: +86755 29790278

www.koontech.com


Email: jenny@koontech.com sales1@koontech.com

www.hksosphone.com

---

is a detachable GRP shelf with easy cable entry.

### Telephone layout:

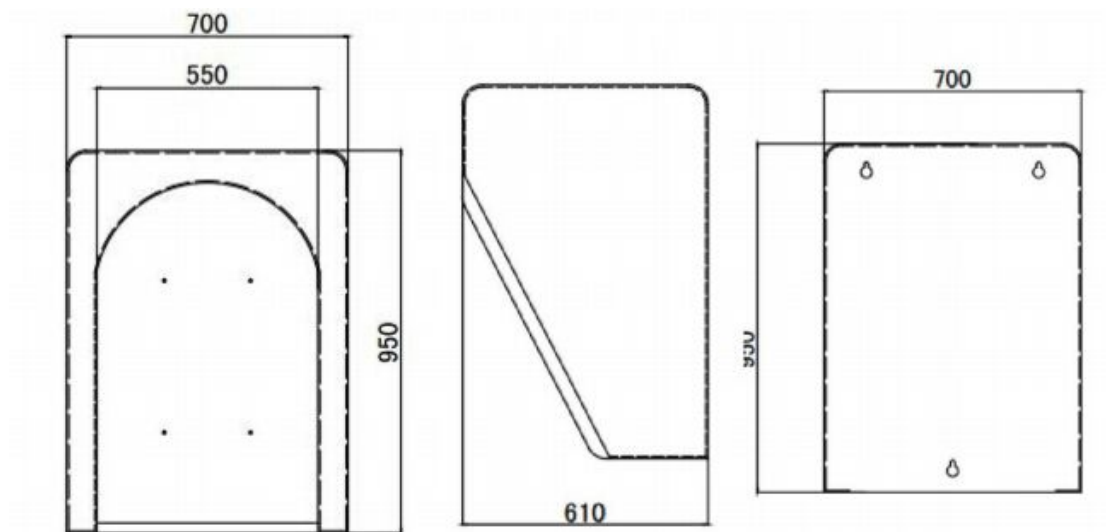

### Specifications:

**Color:** Yellow **Body material in GRP(Glass reinforced plastic)**

Dimensions: H940mm W700mm D620mm

Weight -Approx 23Kg

Outer Shell & Shelf -General Purpose Resin continuous filament mat -Fire Resistance to BS476 Part 7 Class 1 Surface Spread of Flame

Acoustic Insulation -50mm Tissue faced non hygroscopic Rockwool (RW3) density 60kg/m<sup>3</sup>

Insulation Liner -White Perforated Polypropylene 3mm thickness

Boxed Dimensions -980 x 800 x 680mm

Boxed Weight -Approx 26kg

### Certification:





## HONGKONG KOON TECHNOLOGY LIMITED

268#, Nangchang industrial park, Gushu, Baoan district,  
Shenzhen, China

Tel: +86 755 27448753 ext 8015 Fax: +86755 29790278

[www.koontech.com](http://www.koontech.com)

Email: [jenny@koontech.com](mailto:jenny@koontech.com) [sales1@koontech.com](mailto:sales1@koontech.com)

[www.hksosphone.com](http://www.hksosphone.com)

---

EMC: EN50121 (Railway application- Electromagnetic Compatibility)

EN55022: emissions EN55024: immunity

FCC

ITU-T Recommendations K21

### Reference Photo:





## HONGKONG KOON TECHNOLOGY LIMITED

268#, Nangchang industrial park, Gushu, Baoan district,  
Shenzhen, China

Tel: +86 755 27448753 ext 8015 Fax: +86755 29790278

[www.koontech.com](http://www.koontech.com)

Email: [jenny@koontech.com](mailto:jenny@koontech.com) [sales1@koontech.com](mailto:sales1@koontech.com)

[www.hksosphone.com](http://www.hksosphone.com)



### Factory photo:

