



www.koontech.com

香港昆仑科技（深圳）有限公司

Regular Customer

THALES SIEMENS



Alcatel-Lucent



HUAWEI

ERICSSON
TAKING YOU FORWARD

AVAYA
The Power of We




Waterproof phone KNSP-08L5D6



The most professional manufacture in Asia The exclusive supplier for all Metro project in China

The Weatherproof phone will be designed to work on Railway, metro, tunnel, etc. Housed in robust aluminium die case with spring loaded door, it will offer protection against the outdoor environment, vandals resistance and rot resistance. The unit will meet all the latest European/UK standards for EMC and US FCC, telephony, waterproofing IP 66, and lightening protection together with offering the level of performance and reliability demanded in such an environment.

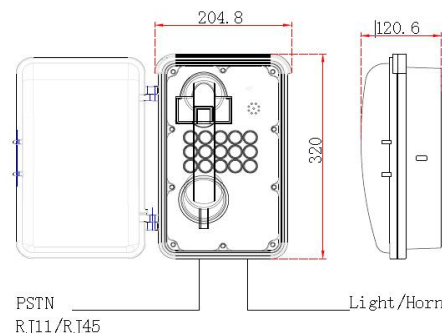

Standard and SMART Analogue and VOIP-SIP GSM options available
DTMF(Dual Tone Multi frequency)
Matching with most PABX, PBX and PAX systems

Main Product features

1. Weather resistant to **IP67** standard, service temperature range **-30° to +75°C**.
2. Full keypad with memory, 10 button programmable speed-dial telephone, illustrated button optional.
3. Robust aluminum alloy die-cast body.
4. Door cover: orient automatically and good self - closing, convenient for use.
5. Magnetic reed hook-switch
6. Robust AC cord, AC power supply from 110V~240V. Built in battery optional. .
7. Lightening protection to ITU-T recommendation K.21
8. Handset: made of special engineering plastic, high anti-knock resistance, Weatherproof, armoured cable optional.
9. Hearing Aid compatible receiver, Noise canceling microphone.
10. Handset integrity wiring to enable the telephone system to check if the telephone unit is still operational.
11. Selectable 7 minute time out, to release the line if the handset is left off hook.
12. Adjustable ringer and volume control

Main PCB

1. Well treated PCB used inside the phone.
2. Robust screw terminals used for the connection of ringer,
3. All connectors be greased in production

Handset

1. Kirk electro dynamic transducer for both handset transmitter and receiver
2. Spring cable or armoured cable to attach the handset to the telephone main unit
3. Stainless steel cable to connect exchange.
4. Inductive coupler fitted for hearing aid compatibility.
5. Handset integrity wiring to enable exchange to check if the phone is still operational.

VOIP-SIP version

Model No.:KNZD-08L5D6-IP

Connection type: RJ45 Socket inside sealed enclosure
Power supply: Powered by POE (Please tell if you need external 24V dc)

Call set-up Protocol: Session Initiation Protocol (SIP)
Configuration:DHCP or STATIC IP address provisioning




HONGKONG KOON TECHNOLOGY LTD

Tel: 0086755 29790158 / 27448753 Fax:0086755 29790278 Email:koon03@vip.163.com www.koontech.com



The most professional manufacture in Asia
The exclusive supplier for all Metro project in China

Telephone layout

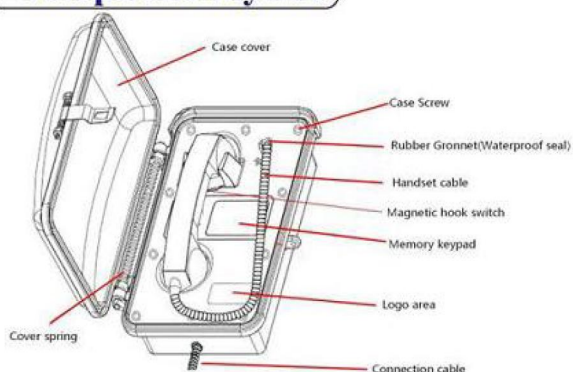

GSM version

Mode No.:KNZD-08L5D6-GSM

GSM 2G/3G Solar Powered with built-in rechargeable battery


1. Network Interface: GSM Frequency: 850/900/1800 /1900MHZ, 2G, 3G,WCDMA, Or CDMA2000
2. Ringing: Through internal Speaker/ringer
3. Power Supply: Re-chargeable Battery powered: 9V/14Ah,
4. Solar back-up: 12V/30W
5. Time out: selectable 0-20 minutes
6. Built-in battery standby: 21 days, can improve to 42 days.
7. Built-in battery talking time: 56hours, can improve to 100 hours

Analogue version

Model No.:KNZD-08L5D6-A

1. Applicable for various types of SPC exchange and dispatching exchange system with feeding voltage of 33V-60V.
2. Ambient temperature:-30°C~70°C Relative humidity:10%~95% Atmospheric pressure: 86~106Kpa Circumstance noise:90-120dB (A)
3. Sound level of ringing :70-85dB (A) .
4. Call transmission index : (7KM)SLR≤12,RLR≤-1, STMR≥10, output impedance is 600Ω.
5. Super strong function is available for dialing 12 groups of numbers stored in the memory (maximum length of each store number is16 digits)

Mounting bracket

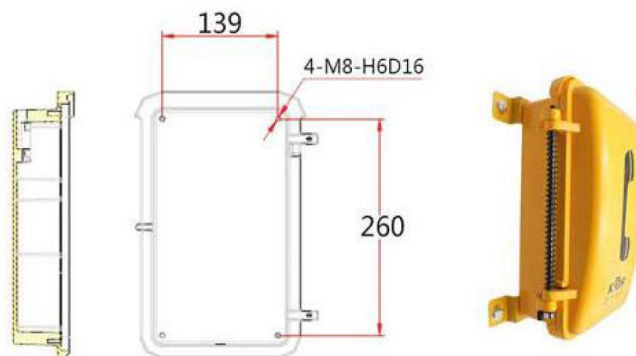

Connection cable

Stainless steel connection cable to exchange.
 Well treated keep waterproof.

Packing detail:



Unit size: 320*205*120mm , N.W: 7.2KG

1pcs in each inner CTN box, size: 439 *277 *191mm G.W: 9KG

4pcs in outer CTN box, size: 566 * 445 *420mm G.W: 37.3KG

1pcs in speaker box size:225*225*215 G.W:1.2KG

Certification:



EMC: EN50121 (Railway application-
 ElectromagneticCompatibility)

EN55022: emissions

En55024: immunity

Ingress Protection: GB4208-93 IP 66

FCC

ITU-T Recommendations K21